


CONDUIT RISER GRIP

⚠ WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov

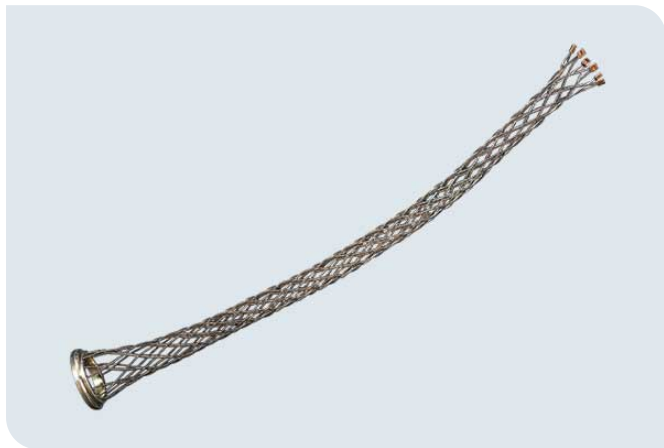


KEY FEATURES

- ✓ Single weave lattice
- ✓ Designed to support electrical cabling
- ✓ Made from Stainless steel wire
- ✓ Split ring option for already installed cabling

Conduit riser grips are designed to support cables within conduit. Designed to match standard conduit sizes. These grips come in single and double weave as indicated in the chart below. Also available in Split Ring design for supporting cable already installed or when the end of the cable is not available.

Call 888-685-9478 for additional sizes and styles.

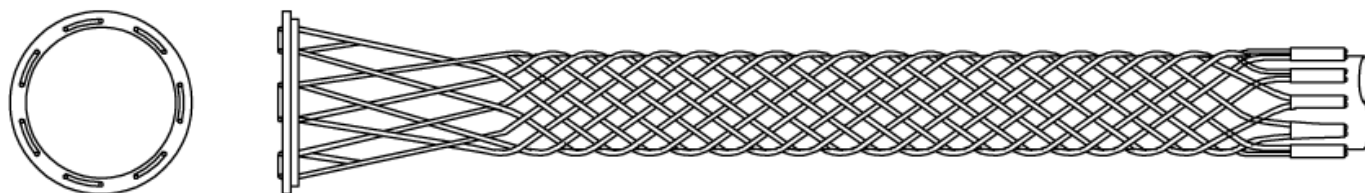

GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

CONDUIT RISER GRIP

Cable dia (in) / Length (in)

-	0.50-0.63 (8)	0.63-0.75 (9)	0.75-1.00 (11)	1.00-1.25 (12)	1.25-1.50 (12)	1.50-1.75 (14)
Conduit size (in)						
0.75	ZCS2690 (530)					
1	ZCS2691 (490)	ZCS2694 (790)				
1.25	ZCS2692 (450)	ZCS2695 (740)	ZCS2698 (1,030)			
1.5		ZCS2696 (690)	ZCS2699 (970)	ZCS2701 (1,610)		
2	ZCS2693 (370)	ZCS2697 (640)	ZCS2700 (920)	ZCS2702 (1,520)	ZCS2704 (1,610)	
2.5			ZCS2171 (870)		ZCS2705 (1,510)	ZCS2707 (1,610)
3				ZCS2703 (1,340)	ZCS2706 (1,400)	ZCS2709 (1,490)
3.5						
4						
4.5						
5						
6						

(continued)

-	1.75-2.00 (15)	2.0-2.5 (17)	2.0-3.0 (17)	2.5-3.0 (18)
Conduit size (in)				
0.75				
1				
1.25				
1.5				
2				
2.5	ZCS2708 (2,150)			
3	ZCS2710 (1,990)	ZCS2711 (3,260)		
3.5		ZCS2714 (2,970)		ZCS2716 (3,260)
4	ZCS2712 (1,670)	ZCS2713 (2,680)	ZCS4500* (2,722)	ZCS2715 (2,890) ZCS4501* (2,722)
4.5				
5			ZCS5645* (2,150)	ZCS2719 (2,150)
6				



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

CONDUIT RISER GRIP

(continued)

-	2.5-3.5 (19)	3.0-3.5 (20)	3.5-4.0 (18)	3.5-4.0 (21)	3.5-4.5 (20)
Conduit size (in)					
0.75					
1					
1.25					
1.5					
2					
2.5					
3					
3.5					
4	ZCS4282 (4,080) SPLIT ROD	ZCS2717 (4,080)			
4.5				ZCS3709 (10,500)	
				ZCS2723 (3,130)	
				ZCS3200* (10,000)	
5		ZCS2721 (2,860) ZCS4502* (2,722) ZCS5646* (3,130)		ZCS4283 (3,080) SPLIT ROD	
6		ZCS2722 (2,240)		ZCS2724 (2,240)	ZCS5647 (2,240)

(continued)

-	4.0-4.5 (21)	4.5-5.0 (27)	4.5-5.0 (27)
Conduit size (in)			
0.75			
1			
1.25			
1.5			
2			
2.5			
3			
3.5			
4			
4.5			
5	ZCS4277 (3,130)		
6	ZCS4755 (2,240)	ZCS3259 (4,995)	ZCS4284 (4,995)

* indicates Double Weave

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478