

FIBER OPTIC CABLE GRIPS

⚠ WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Ranges from 2.5mm to 25mm
- ✓ Protective shoulders to prevent abrasion
- ✓ Flexible for easy install

Dual weave design from galvanized wire rope. Used for the installation of fiber optic cables for either overhead or underground applications. Made of Galvanized Steel.

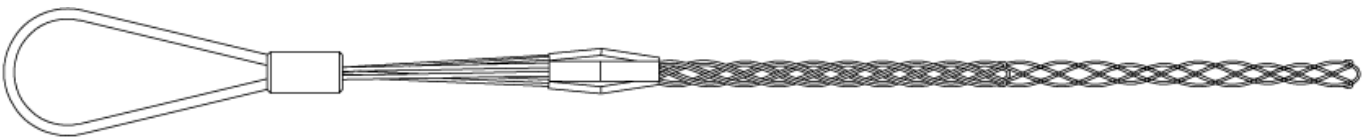

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS2008	2.5 - 5.6	0.11 - 0.23	265	11	455	18	431	950
ZCS2009	5.3 - 9.2	0.21 - 0.36	370	15	560	22	748	1,650
ZCS2010	8.1 - 12.5	0.32 - 0.49	470	19	690	27	998	2,200
ZCS2011	10.7 - 15.8	0.42 - 0.62	515	20	735	29	1,247	2,750
ZCS2012	13.5 - 19.1	0.53 - 0.75	595	23	815	32	1,678	3,700
ZCS2013	16.3 - 22.4	0.64 - 0.88	645	25	865	34	1,928	4,250
ZCS2014	19.1 - 25.5	0.75 - 1.00	720	27	940	37	1,928	4,250

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478