

GLOVE & SLEEVE BAGS

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Durable Canvas construction
- ✓ Convenient flap closure
- ✓ Four Glove Bag options
- ✓ Combination Glove & Sleeve bags
- ✓ Sleeve only bag available

Protecting your gloves and sleeves is convenient with Slingco canvas bags. Bags feature a hook with latch for attaching to belt and flap closure.

Glove bags come in four sizes 12", 14", 16" and 18".

Compact and full-size Combination Glove & Sleeve bags are available.

We also offer a Sleeve Bag option.




GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

GLOVE & SLEEVE BAGS

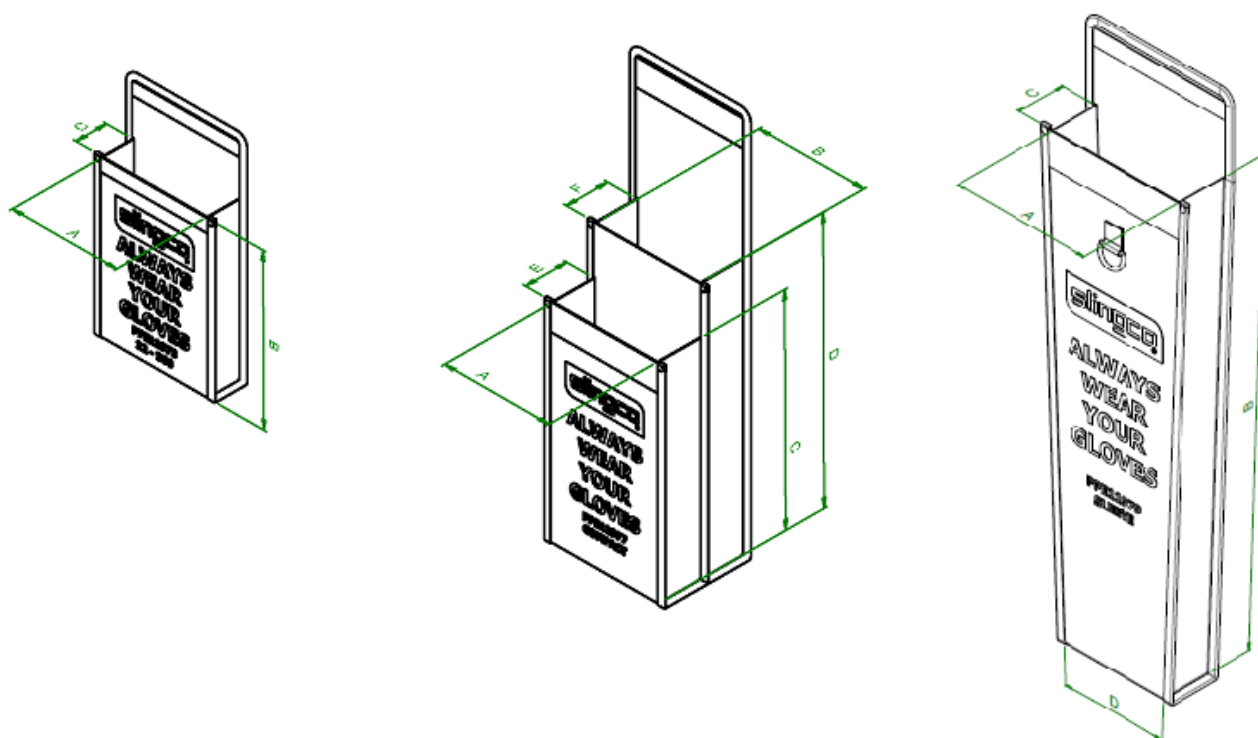

Glove Bags

Slingco Part No.	Description	'A' Width in (mm)	'B' Height in (mm)	'C' Depth in (mm)	Weight lb (kg)
PPE11973	12" Glove Bag	7.78 (200)	11.73 (298)	2.36 (60)	0.4 (0.18)
PPE11974	14" Glove Bag	7.78 (200)	14.88 (378)	3.54 (90)	0.5 (0.23)
PPE11975	16" Glove Bag	7.78 (200)	16.85 (428)	3.54 (90)	0.6 (0.27)
PPE11976	18" Glove Bag	7.78 (200)	18.82 (478)	3.94 (100)	0.7 (0.32)

Slingco Part No.	Description	'A' Width in (mm)	'E' Glove Depth in (mm)	'C' Glove Height in (mm)	'B' Sleeve Width in (mm)	'F' Sleeve Depth in (mm)	'D' Sleeve Height in (mm)	Weight lb (kg)
PPE11977	Compact Glove & Sleeve Bag	7.78 (200)	3.15 (80)	15.67 (398)	7.78 (200)	3.15 (80)	19.21 (488)	0.9 (0.41)
PPE11978	Full-Size Glove & Sleeve	7.78 (200)	3.94 (100)	18.82 (478)	7.78 (200)	1.76 (70)	29.45 (748)	1.4 (0.64)

Slingco Part No.	Description	'A' Width Top in (mm)	'D' Width Bottom in (mm)	'C' Depth in (mm)	'B' Height in (mm)	Weight lb (kg)
PPE11979	Sleeve Bag	7.78 (200)	6.7 (170)	2.76 (70)	27.09 (688)	0.8 (0.36)

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com