


HEAVY DUTY SUPPORT GRIPS – DOUBLE EYE ROD CLOSING

⚠ WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov

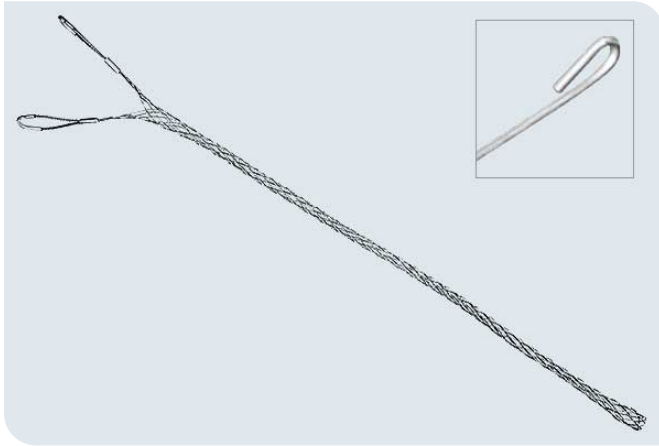

KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle
- ✓ Used when the ends of the cable(s) are not accessible

Heavy Duty support grips made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by Utilities and Contractors to support cables transitioning from overhead to underground. One may support multiple cables in one grip. The overall diameter of the cable bundle should fit within the listed range.

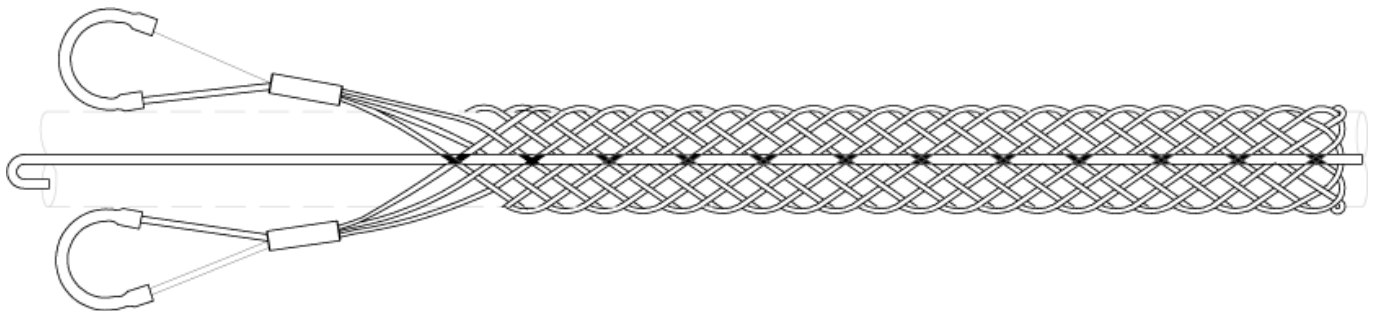

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Lattice Material	Lattice Material	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS7098	13 - 16	0.50 - 0.63	277	11	Stainless Steel	304 SS	621	1,370
ZCS7099	16 - 19	0.63 - 0.75	309	12	Stainless Steel	304 SS	944	2,080
ZCS7100	19 - 25	0.75 - 1.00	351	14	Stainless Steel	304 SS	944	2,080
ZCS7101	25 - 32	1.00 - 1.25	391	15	Stainless Steel	304 SS	1,211	2,670
ZCS7102	32 - 38	1.25 - 1.50	417	16	Stainless Steel	304 SS	2,037	4,490
ZCS7103	38 - 44	1.50 - 1.75	494	16.5	Stainless Steel	304 SS	2,037	4,490
ZCS7104	44 - 51	1.75 - 2.00	537	17.5	Stainless Steel	304 SS	2,269	5,000
ZCS7105	51 - 63	2.00 - 2.50	654	26	Stainless Steel	304 SS	4,056	8,940
ZCS7106	63 - 76	2.50 - 3.00	623	25	Stainless Steel	304 SS	4,056	8,940
ZCS7107	76 - 87	3.00 - 3.50	693	27	Stainless Steel	304 SS	6,089	13,420
ZCS7108	87 - 102	3.50 - 4.00	914	36	Stainless Steel	304 SS	6,089	13,420



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

HEAVY DUTY SUPPORT GRIPS – DOUBLE EYE ROD CLOSING

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478