

LINE PULLING SWIVEL - GALVANIZED

WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Releases torsion
- ✓ Prevents damage to cable or grip
- ✓ Suitable for underground or overhead applications
- ✓ Straight line pulling only

Slingco Line Swivels are designed to the highest specifications for underground and overhead pulling applications. All swivels are stringently quality tested and inspected to ensure optimum reliability and performance.

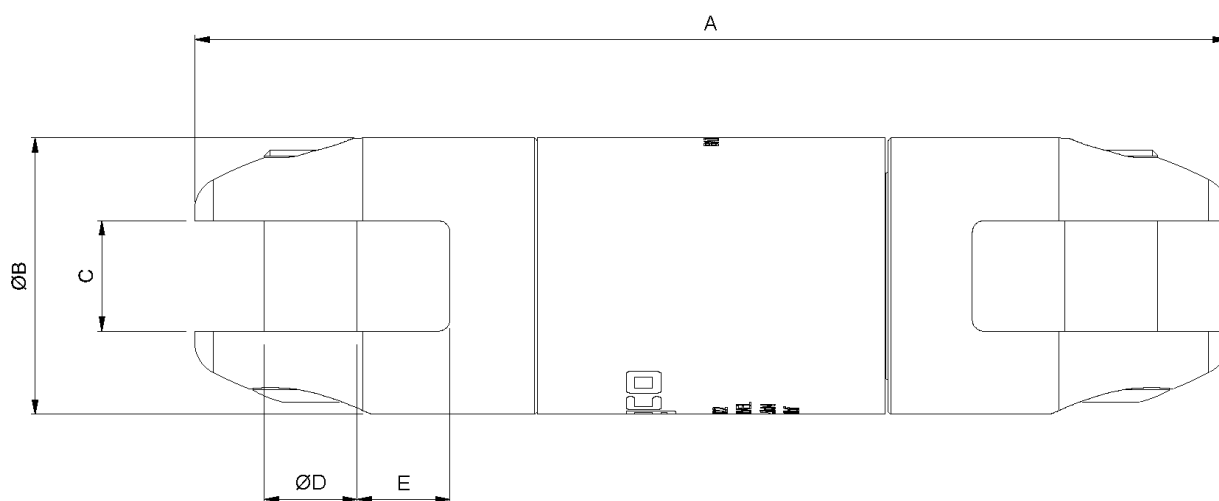

GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

LINE PULLING SWIVEL - GALVANIZED

Slingco Part No.	Safe Working Load - 3:1 (kN)	Safe Working Load - 3:1 (lb)	Safe Working Load - 5:1 (kN)	Safe Working Load - 5:1 (lb)	A Length (mm)	A Length (in)	Ø B (mm)	Ø B (in)	C (mm)	C (in)	Ø D Pin (mm)	Ø D Pin (in)	E Recess (mm)	E Recess (in)	Weight (kg)	Weight (lb)
ZSW2649	17.8	4,000	10.6	2400	120.5	4.74	32	1.26	15.5	0.61	13.3	0.37	9.5	0.37	0.46	1.01
ZSW2929	35.5	8,000	21.3	4,800	136.6	5.38	38	1.5	16	0.63	15.5	0.61	11	0.43	0.80	1.75
ZSW6122	44.5	10,000	26.7	6,000	178	7	47.6	1.87	19.05	0.75	16	0.63	16	0.63	1.69	3.72
ZSW6123	71.2	16,000	42.7	9,600	259	10.2	62	2.44	25.4	1	28.5	1.12	22	0.87	4.17	9.19
ZSW2857	134	30,000	80	18,000	282.6	11.13	63.5	2.5	25.4	1	28.62	1.13	22	0.87	4.74	10.44

3:1 factor of safety and 5:1 factor of safety provided for reference only

Flexible Eye MU	Revolving Eye	Approx. breaking strength of cable grip (kN)	Approx. breaking strength of cable grip (lb)	Cable grip colour code	Size range O.D. (mm)	Size range O.D. (in)	Recommended swivel	Safe working load of swivel at 3:1 (kN)	Safe working load of swivel at 3:1 (lb)
ZCS1710	ZCS2177	31.1	7,000	Dark green	06-Dec	0.25 - 0.50	ZSW2649	17.8	4,000
ZCS1711	ZCS2178	46.7	10,500	Brown	Dec-19	0.50 - 0.75	ZSW2929	22.2	5,000
ZCS1712	ZCS2179	62.7	14,100	Light blue	19 - 25	0.75 - 1.00	ZSW2929	22.2	5,000
ZCS1713	ZCS2180	111.2	25,000	Gold	25 - 32	1.00 - 1.25	ZSW6122	44.5	10,000
ZCS1714	ZCS2181	137.9	31,000	Black	32 - 38	1.25 - 1.50	ZSW6122	44.5	10,000
ZCS1715	ZSC2182	137.9	31,000	Red	38 - 44	1.50 - 1.75	ZSW6122	44.5	10,000
ZCS1716†	ZSC2183*	191.3 - 218	43,000*-49,000†	Dark blue	44 - 57	1.75 - 2.25	ZSW6123	71.2	16,000

The above is intended as a rough guide. The recommended working load should be determined by the competent person(s) using the cable grip and/or Slingco swivel.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478