


# LOCKING BALE BUS/SERVICE DROP GRIP

## **WARNING**

Cancer and Reproductive Harm: [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

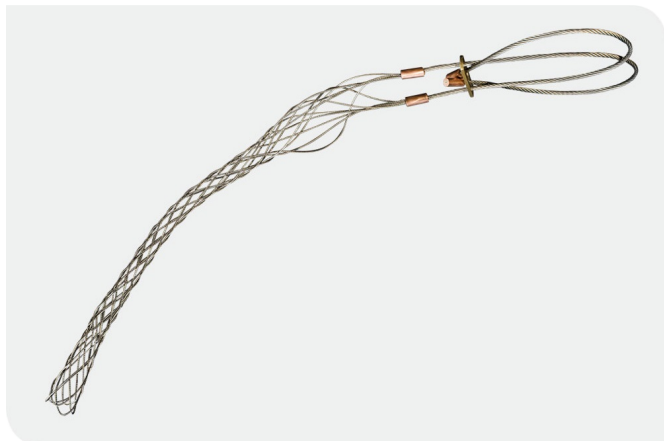

## KEY FEATURES

- ✓ Locking Bale/Universal Eye for attaching to pipe, conduit
- ✓ Range accommodates cables from 0.22" to 1.25"
- ✓ Simple to open or secure eye wires

These locking bale (universal eye) Bus/Service drop grips are perfect for supporting cables when a simple attachment point is not available. The wires of the locking bale may be looped over a pipe, conduit or beam and secured in the eye locking plate. This provides a secure support for the cable.

Just run the power or other cable through the mesh of the grip and make your connection. Then position the grip to support the cable at the most advantageous position to relieve strain and resist pull out.




## GET IN TOUCH

 01706 855 558

 [sales@slingco.com](mailto:sales@slingco.com)

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558  
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

# LOCKING BALE BUS/SERVICE DROP GRIP

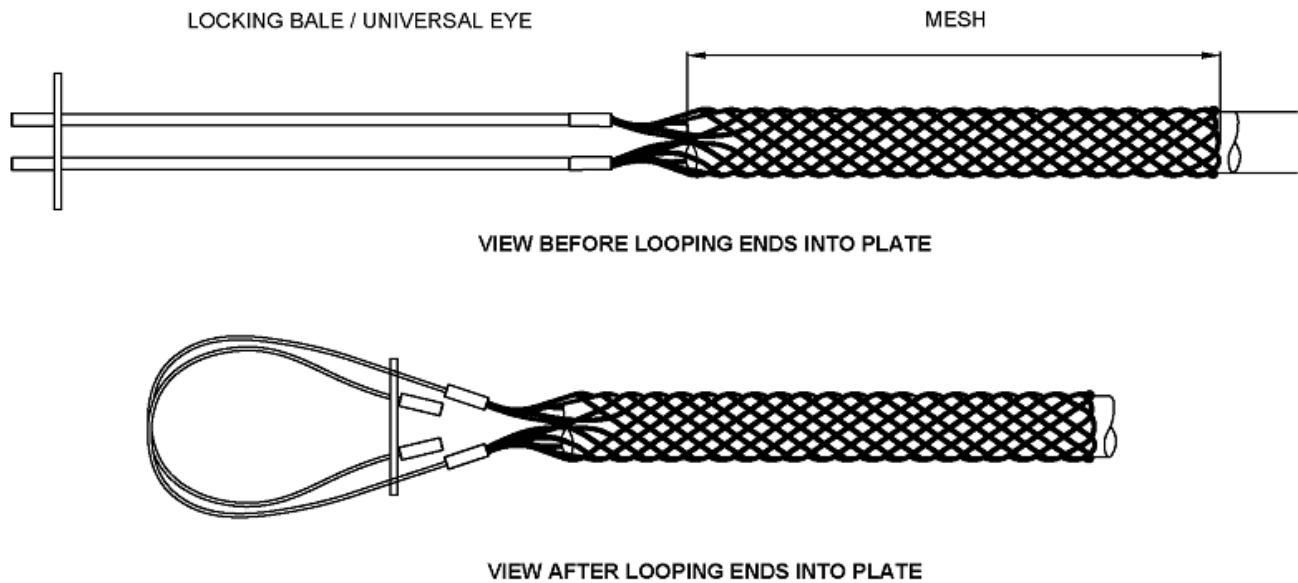

| Slingco Part No. | Range (mm)  | Range (in)  | Bale Length (mm) | Bale Length (in) | Mesh Length (mm) | Mesh Length (in) | Approx. Break Load (kg) | Approx. Break Load (lb) | Wire Material | Wire Material |
|------------------|-------------|-------------|------------------|------------------|------------------|------------------|-------------------------|-------------------------|---------------|---------------|
| ZCS8588          | 5.6 - 8.1   | 0.22 - 0.32 | 305              | 12               | 89               | 3.5              | 498                     | 1100                    | Galvanised    | Galvanized    |
| ZCS8589          | 7.5 - 10.9  | 0.30 - 0.43 | 305              | 12               | 114              | 4.5              | 498                     | 1100                    | Galvanised    | Galvanized    |
| ZCS8590          | 10.4 - 14.2 | 0.41 - 0.56 | 305              | 12               | 127              | 5.0              | 498                     | 1100                    | Galvanised    | Galvanized    |
| ZCS8591          | 13.5 - 18.5 | 0.53 - 0.73 | 381              | 15               | 165              | 6.5              | 498                     | 1100                    | Galvanised    | Galvanized    |
| ZCS8592          | 18 - 22     | 0.70 - 0.85 | 406              | 16               | 216              | 8.5              | 861                     | 1900                    | Galvanised    | Galvanized    |
| ZCS8593          | 21 - 25     | 0.82 - 1.0  | 406              | 16               | 216              | 8.5              | 861                     | 1900                    | Galvanised    | Galvanized    |
| ZCS8594          | 24 - 32     | 0.96 - 1.25 | 432              | 19               | 279              | 11               | 861                     | 1900                    | Galvanised    | Galvanized    |

## Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

## Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



## GET IN TOUCH

☎ 01706 855 558

✉ [sales@slingco.com](mailto:sales@slingco.com)