

OPEN ENDED GRIPS

WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Available in galvanized steel or stainless steel
- ✓ Single, double triple weave configuration
- ✓ Range from 10mm - 140mm

Ideal for joining two cables to form a continuous loop. Typical application: replacement of lift cables, where the old cable would be attached to the new one, and the cable then fed around with ease. Also used to temporarily splice cable and conductor where torsion forces are NOT an issue. Torsion should be released prior to splicing. Where torsion is present a swivel and two grips should be used.

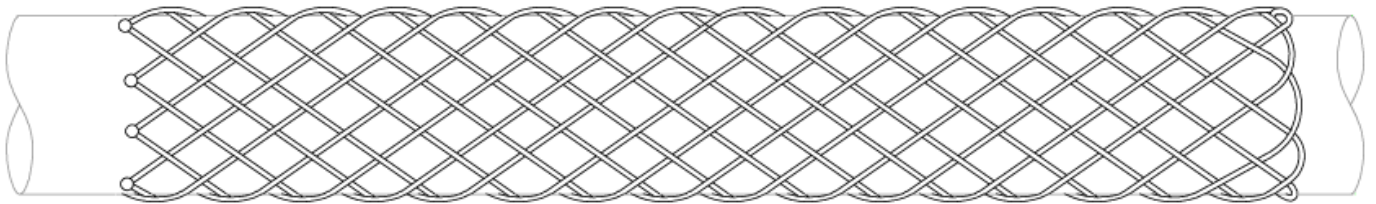

GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

OPEN ENDED GRIPS

Open Ended Standard Grip - Galvanised

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS0313	6 - 13	0.25 - 0.50	Single	380	15	760	1,680
ZCS6420	6 - 13	0.25 - 0.50	Double	559	22	1,588	3,500
ZCS0314	13 - 19	0.50 - 0.75	Single	610	24	1,015	2,240
ZCS6421	13 - 19	0.50 - 0.75	Double	762	30	1,815	4,000
ZCS6425	13 - 19	0.50 - 0.75	Multi	1,779	70	3,400	7,500
ZCS0315	19 - 25	0.75 - 1.00	Single	710	28	2,540	5,600
ZCS6422	19 - 25	0.75 - 1.00	Triple	762	30	3,630	8,000
ZCS6426	19 - 25	0.75 - 1.00	Multi	2,032	80	5,352	11,800
ZCS0316	25 - 38	1.00 - 1.50	Single	815	32	3,555	7,840
ZCS6423	25 - 38	1.00 - 1.50	Double	915	36	4,537	10,000
ZCS6427	25 - 38	1.00 - 1.50	Multi	2,285	90	9,070	20,000
ZCS0317	38 - 50	1.50 - 2.00	Double	915	36	5,080	11,200
ZCS0318	50 - 63	2.00 - 2.50	Double	1,065	42	5,080	11,200
ZCS1158	63 - 89	2.50 - 3.50	Double	1,220	48	6,095	13,440
ZCS1159	89 - 115	3.50 - 4.50	Double	1,370	54	7,110	15,680
ZCS6424	108 - 124	4.25 - 4.88	Triple	1,400	55	8,847	19,500
ZCS1975	115 - 140	4.50 - 5.50	Double	1,370	54	7,110	15,680

Open Ended Standard Grip - 316 Stainless Steel

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS1995	6 - 13	0.25 - 0.50	Single	380	15	610	1,344
ZCS1996	13 - 19	0.50 - 0.75	Single	610	24	810	1,792
ZCS1997	19 - 25	0.75 - 1.00	Single	710	28	2,030	4,480
ZCS1998	25 - 38	1.00 - 1.50	Single	815	32	2,845	6,272
ZCS1999	38 - 50	1.50 - 2.00	Double	915	36	4,065	8,960
ZCS2000	50 - 63	2.00 - 2.50	Double	1,065	42	4,065	8,960
ZCS2001	63 - 89	2.50 - 3.50	Double	1,220	48	4,875	10,752
ZCS2002	89 - 115	3.50 - 4.50	Double	1,370	54	5,690	12,544
ZCS2003	115 - 140	4.50 - 5.50	Double	1,370	54	5,690	12,544
ZCS11923	165 - 191	6.50 - 7.50	Double	3,048	120	5,690	12,544

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com