


# POLE LIGHT KITS

## **WARNING**

Cancer and Reproductive Harm: [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

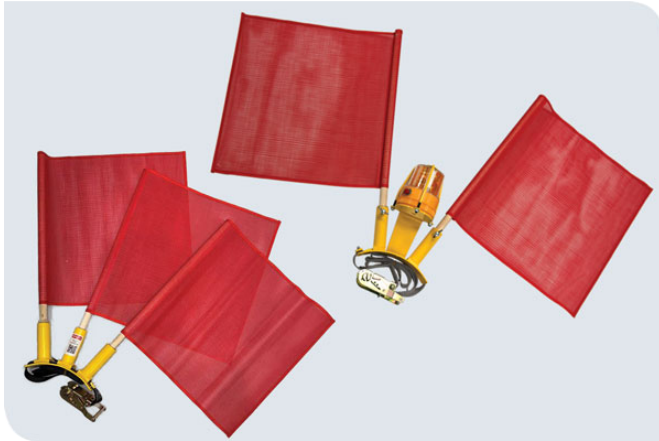

## KEY FEATURES

- ✓ 360° LED light
- ✓ Heavy-duty frame
- ✓ Ratchet strap
- ✓ High-visibility warning flags
- ✓ Lumens: 15,000 MCD

## High visibility safety for oversized loads

The Slingco Pole Light Kit is a rugged, all-in-one solution for marking utility poles during transit. Designed for durability and ease of use, it provides consistent 360° visibility to keep your crew and the public safe.

The kit includes a 360 degree LED Pole Light with two settings (flash and solid), heavy-duty frame to withstand field use, ratchet strap for quick and secure attachment to the pole, and high-visibility warning flags. The kit is supplied with two 'D' size batteries for immediate deployment.

Slingco recommends that you comply with all DOT transportation regulations for your state. This product is intended to be temporary. Inspect item before each use for wear, tear, or damage of any kind.

Scan the QR code on the unit to access the product manual any time.

### Light Kit

| Slingco Part No. | Description                     |
|------------------|---------------------------------|
| TPE12606-A       | Pole Light Kit with AMBER light |
| TPE12606-R       | Pole Light Kit with RED light   |
| TPE12606-2F      | No Light, w/2 Flags             |
| TPE12606-3F      | No Light, w/3 Flags             |

### Spare Parts

| Slingco Part No. | Description                    |
|------------------|--------------------------------|
| TPE12409         | AMBER Light for pole light kit |
| TPE12589         | RED Light for pole light kit   |
| TPE12579         | Flags (pair)                   |
| TPE12670         | Ratchet straps                 |

### Dimensions



## GET IN TOUCH

☎ 01706 855 558

✉ [sales@slingco.com](mailto:sales@slingco.com)

# POLE LIGHT KITS

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

## Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



## GET IN TOUCH

☎ 01706 855 558

✉ [sales@slingco.com](mailto:sales@slingco.com)

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558  
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478