

SPLICING GRIPS - ROTATING SWIVEL LINK

⚠ WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Suitable for drilling rigging systems
- ✓ Link opens for easy installation and adjustment
- ✓ Can be used with different sized grips on each side

Slingco Rotating Swivel Link Grips are perfect for stringing replacement wire and cable on equipment and in drilling or rigging systems. Not recommended for use in overhead stringing applications. Use the existing cable as a pull wire to string the replacement cable. These grips are available with differently sized grips for each side. Call for assistance in selecting the proper grip. Link opens for easy installation and adjustment. Made of galvanized steel.

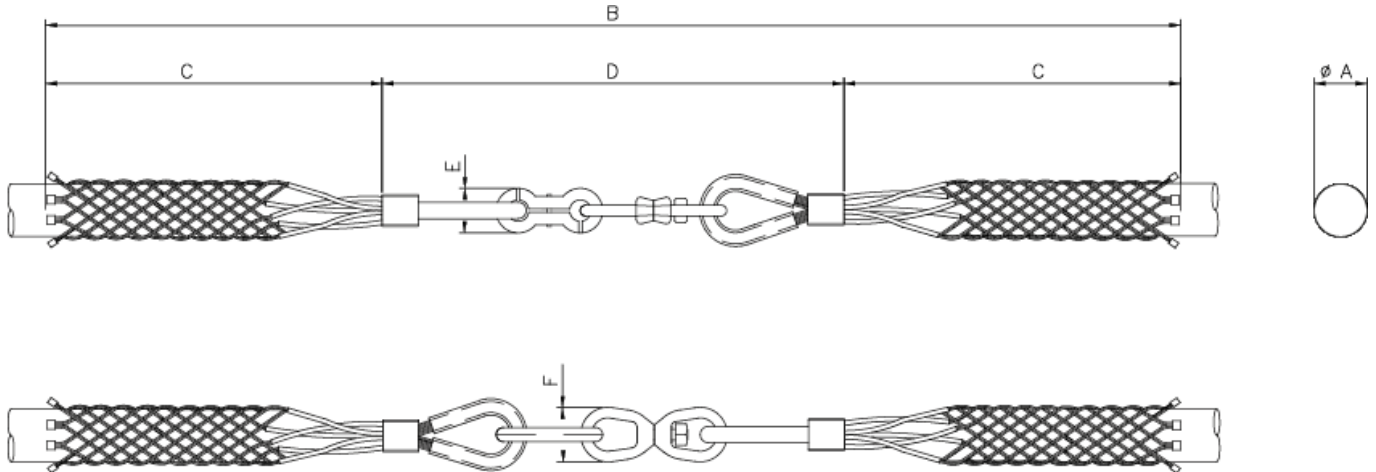

GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

SPLICING GRIPS - ROTATING SWIVEL LINK

Slingco Part No.	Range (mm)	Range (in)	Ø A Length (mm)	B Length (mm)	B Length (in)	C Length (mm)	C Length (in)	D Length (mm)	D Length (in)	E Length (mm)	E Length (in)	F Length (mm)	F Length (in)	Approx. Break Load (kg)
ZCS3493	6 - 13	0.25 - 0.50	9.5	2,542	100.0	1,127	44.3	288	11.3	22	0.87	32	1.25	1,089
ZCS3494	13 - 25	0.50 - 1.00	19	2,621	103.2	1,160	45.7	301	11.8	35	1.38	32	1.25	1,599
ZCS3495	25 - 38	1.00 - 1.50	32	2,654	104.5	1,160	45.7	334	13.1	41	1.61	41	1.61	2,300
ZCS3496	38 - 51	1.50 - 2.00	44.5	2,673	105.2	1,160	45.7	353	13.9	41	1.61	51	2.0	3,629
ZCS3497	51 - 70	2.00 - 2.75	60.5	2,673	105.2	1,160	45.7	353	13.9	41	1.61	51	2.0	4,537
ZCS3498	70 - 90	2.75 - 3.50	80	2,673	105.2	1,160	45.7	353	13.9	41	1.61	51	2.0	4,537
ZCS3499	89 - 108	3.50 - 4.25	98.5	2,753	108.4	1,200	45.7	353	13.9	41	1.61	51	2.0	4,537

(continued)

Slingco Part No.	Approx. Break Load (lb)
ZCS3493	2,400
ZCS3494	3,526
ZCS3495	5,070
ZCS3496	8,000
ZCS3497	10,000
ZCS3498	10,000
ZCS3499	10,000

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478