

SUPPORT SPRINGS

⚠ WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov




KEY FEATURES

- ✓ Two working load strengths: 40 lbs & 80 lbs
- ✓ Spring compresses to relieve strain

Support the dead weight of cables. Used in conjunction with support, service or bus drop grips. These safety springs relieve strain by dampening pull vibrations. Available in two working load strengths. The safety spring helps prevent pull outs. Avoid downtime and accidents from disconnected cables.

May be used with any support grips. Attach grip eye to bottom of spring.

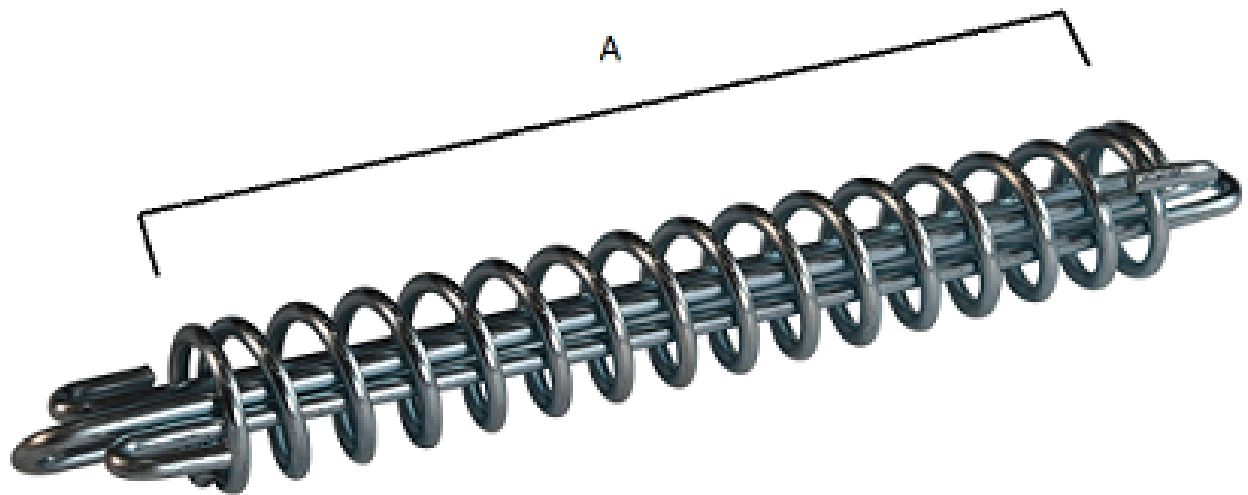

GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

SUPPORT SPRINGS

Slingco Part No.	Working Load (kg)	Working Load (lb)	Diameter (mm)	Diameter (in)	Spring Length "A" (mm)	Spring Length ""A"" (in)
ZCS8560	18.14	40	19	0.75	155	6.1
ZCS8561	36.28	80	25.4	1	155	6.1

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478