

# BUS DROP SOCKS

## **WARNING**


Cancer and Reproductive Harm: [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



## KEY FEATURES

- ✓ Lightweight application
- ✓ Reduces strain on electrical connections
- ✓ Available in Galvanised or Stainless Steel Wire

Lightweight easy to use Bus Drop Socks are perfect for supporting cables in such applications as data centres, control centres and other wiring-to-rack applications. Available in galvanised or stainless steel.

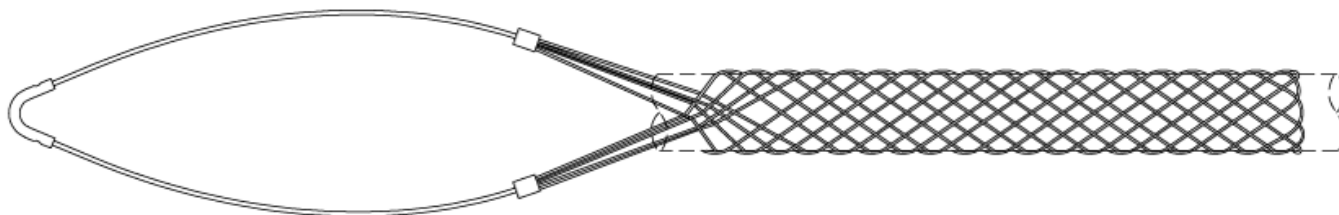

## GET IN TOUCH

 01706 855 558

 [sales@slingco.com](mailto:sales@slingco.com)

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558  
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

# BUS DROP SOCKS

| Slingco Part No. | Range (mm)  | Range (in)  | Wire Material           | Wire Material           | Eye Length (mm) | Eye length (in) | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|-------------|-------------|-------------------------|-------------------------|-----------------|-----------------|-------------------------|-------------------------|
| ZCS6969          | 6.1 - 8.1   | 0.22 - 0.32 | Galvanised              | Galvanized              | 88.9            | 3.5             | 158                     | 350                     |
| ZCS6970          | 8.1 - 10.9  | 0.30 - 0.43 | Galvanised              | Galvanized              | 101.6           | 4               | 204                     | 450                     |
| ZCS6971          | 10.9 - 14.2 | 0.41 - 0.56 | Galvanised              | Galvanized              | 120.6           | 4.75            | 249                     | 550                     |
| ZCS6972          | 14.2 - 18.5 | 0.53 - 0.73 | Galvanised              | Galvanized              | 152.4           | 6               | 453                     | 1,000                   |
| ZCS6973          | 18.5 - 21.6 | 0.70 - 0.85 | Galvanised              | Galvanized              | 171.4           | 6.75            | 635                     | 1,400                   |
| ZCS6974          | 21.6 - 25.4 | 0.82 - 1.00 | Galvanised              | Galvanized              | 203.2           | 8               | 635                     | 1,400                   |
| ZCS6975          | 25.4 - 31.7 | 0.96 - 1.25 | Galvanised              | Galvanized              | 241.3           | 9.5             | 680                     | 1,500                   |
| ZCS09744         | 6.1 - 8.1   | 0.22 - 0.32 | 304 Stainless Steel     | 304 Stainless Steel     | 88.9            | 3.5             | 45.36                   | 100                     |
| ZCS09745         | 8.1 - 10.9  | 0.30 - 0.43 | 304 Stainless Steel     | 304 Stainless Steel     | 101.6           | 4               | 117.9                   | 260                     |
| ZCS09746         | 10.9 - 14.2 | 0.41 - 0.56 | 304 Stainless Steel     | 304 Stainless Steel     | 120.6           | 4.75            | 249                     | 550                     |
| ZCS09717         | 14.2 - 18.5 | 0.53 - 0.73 | 304 Stainless Steel     | 304 Stainless Steel     | 152.4           | 6               | 453                     | 1,000                   |
| ZCS09747         | 18.5 - 21.6 | 0.70 - 0.85 | 304 Stainless Steel     | 304 Stainless Steel     | 171.4           | 6.75            | 635                     | 1,400                   |
| ZCS09748         | 21.6 - 25.4 | 0.82 - 1.00 | 304 Stainless Steel     | 304 Stainless Steel     | 203.2           | 8.0             | 635                     | 1,400                   |
| ZCS09749         | 25.4 - 31.7 | 0.96 - 1.25 | 304 Stainless Steel     | 304 Stainless Steel     | 241.3           | 9.5             | 680                     | 1,400                   |
| ZCS09968         | 10.9 - 14.2 | 0.41 - 0.56 | ALL 316 Stainless Steel | ALL 316 Stainless Steel | 120.6           | 4.75            | 249                     | 550                     |
| ZCS09969         | 14.2 - 18.5 | 0.53 - 0.73 | ALL 316 Stainless Steel | ALL 316 Stainless Steel | 152.4           | 6               | 453                     | 1,000                   |
| ZCS10400         | 18.5 - 21.6 | 0.70 - 0.85 | ALL 316 Stainless Steel | ALL 316 Stainless Steel | 171.4           | 6.75            | 635                     | 1,400                   |
| ZCS10401         | 21.6 - 25.4 | 0.82 - 1.00 | ALL 316 Stainless Steel | ALL 316 Stainless Steel | 203.2           | 8.0             | 635                     | 1,400                   |

## Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

## Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



## GET IN TOUCH

☎ 01706 855 558

✉ [sales@slingco.com](mailto:sales@slingco.com)

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558  
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478