


C-CLAMPS

⚠ WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov

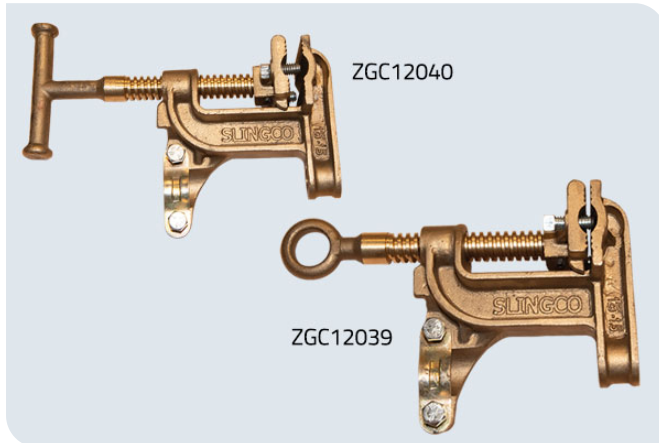

KEY FEATURES

- ✓ Meets ASTM F855 specification
- ✓ Line range up to 2" (50.8 mm)
- ✓ Adjustable to ensure secure connection between clamp and cable




Slingco's grounding clamps meet ASTM F855 and have a maximum line range of up to 2" (50.8mm) which allows them to be used in a wide variety of grounding applications.

Aluminium clamps

Slingco's aluminium grounding clamps have a location for a grounding stud which allows for a wide variety of grounding applications. The Slingco aluminium clamps come with serrated and a smooth jaw offering.

Bronze clamps

Slingco's bronze grounding clamps have set screws in the moveable jaw which allows the user to adjust and make sure there is a secure connection between the clamp and cable. The flat face clamps come with a serrated jaw and are available with a T-handle or Eye Bolt.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

C-CLAMPS

Slingco Part. No.	Description	Clamp Material	Eye Type	Class/ASTM Grade	Line Range (mm)	Line Range (in)	Weight (kg)	Weight (lb)
ZGC12033	Duckbill Clamp w/o Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5H	4.06-42.16	0.16-1.66	0.84	1.85
ZGC12034	Duckbill Clamp w/ Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5H	4.06-42.16	0.16-1.66	0.90	1.98
ZGC12035	1.5" (38 mm) C-Clamp w/o Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5	4.06-38.10	0.16-1.50	0.84	1.85
ZGC12036	1.5" (38 mm) C-Clamp w/ Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5	4.06-38.10	0.16-1.50	0.90	1.98
ZGC12037	2" (51 mm) C-Clamp w/ Serrated Jaw	Aluminum	Eye Bolt	Class B/Grade 5H	4.06-50.80	0.16-2.00	1.02	2.25
ZGC12038	2" (51 mm) C-Clamp w/ Smooth Jaw	Aluminum	Eye Bolt	Class A/Grade 5H	4.06-50.80	0.16-2.00	1.00	2.20
ZGC12039	1.5" (38 mm) Flat Face Grounding	Bronze	Eye Bolt	Class B/Grade 5	3.18-38.10	0.125-1.50	0.90	1.98
ZGC12040	1.5" (38 mm) Flat Face Grounding	Bronze	T Handle	Class B/Grade 5	3.18-38.10	0.125-1.50	0.98	2.16

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478