

FIBREGLASS EXTENSION ARM

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ ASTM F711 compliant
- ✓ Dual crossarm brackets to fit up to a 6" x 6" crossarm
- ✓ Fits up to 1.6" cable
- ✓ Rated for 34.5kV with insulators and 15kV without insulators
- ✓ Easy to install
- ✓ Furnished with bronze eye bolts

VERSATILE MOUNTING OPTIONS FOR TEMPORARY MOVEMENT OF CABLES

The Slingco Fibreglass Extension Arm is used to move conductor to create working clearance in congested areas, or as a temporary aid in replacing insulators and/or conductor. The Fibreglass Extension Arm complies with ASTM F711, OSHA 1910.269 (j)(l), and OSHA 1926.957 (a)(l). The arm is rated for 34.5kV with insulators and 15kV without insulators.

It includes a double bracket system that will fit over crossarms up to 6" x 6". The wire holders will accommodate cables up to 1.6" in diameter. The Slingco Fibreglass Extension Arm includes a QR code so the manual and instructions are always accessible in the field - just scan to view on your mobile.

Slingco offers an optional retrofit kit to protect fibreglass crossarms when the extension arm is installed. The retrofit kit ensures the eye bolts do not penetrate the crossarm. Use the parts diagram to order parts as replacements or add-ons. Convert 15kV model to 34.5kV by adding insulators.





GET IN TOUCH

 01706 855 558

 sales@slingco.com

FIBREGLASS EXTENSION ARM

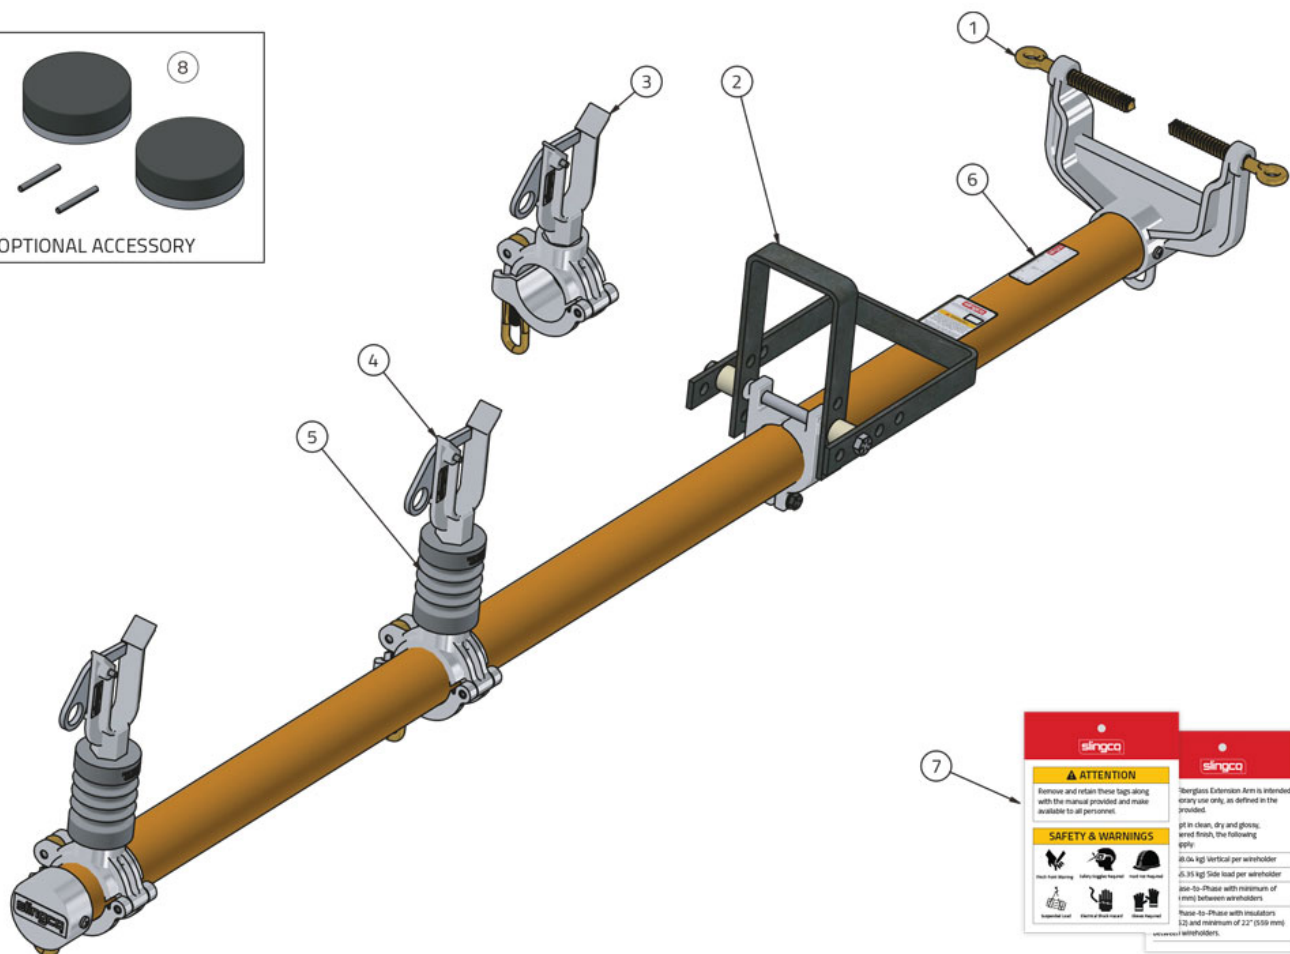

GET IN TOUCH

 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478