


LOCKING BALE BUS/SERVICE DROP SOCK

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov

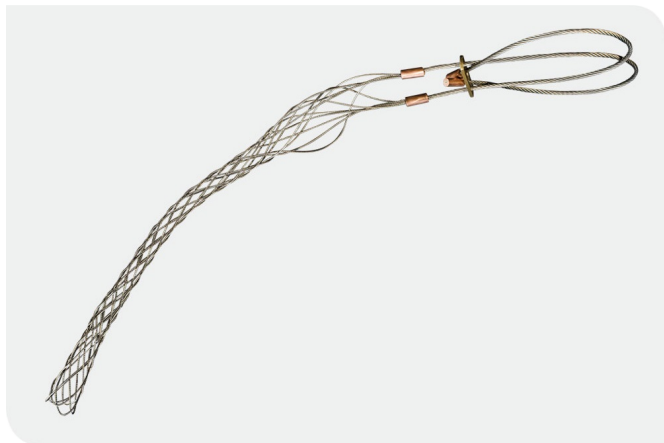

KEY FEATURES

- ✓ Locking Bale/Universal Eye for attaching to pipe, conduit
- ✓ Range accommodates cables from 0.22" to 1.25"
- ✓ Simple to open or secure eye wires

These locking bale (universal eye) bus/service drop socks are perfect for supporting cables when a simple attachment point is not available. The wires of the locking bale may be looped over a pipe, conduit or beam and secured in the eye locking plate. This provides a secure support for the cable.

Just run the power or other cable through the mesh of the grip and make your connection. Then position the grip to support the cable at the most advantageous position to relieve strain and resist pull out.




GET IN TOUCH


 01706 855 558

 sales@slingco.com

LOCKING BALE BUS/SERVICE DROP SOCK

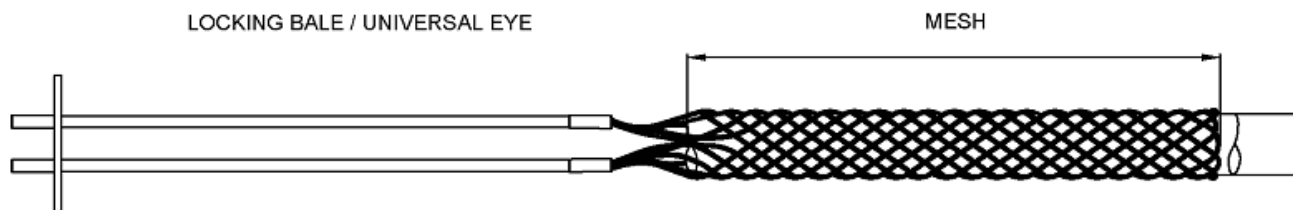

VIEW BEFORE LOOPING ENDS INTO PLATE

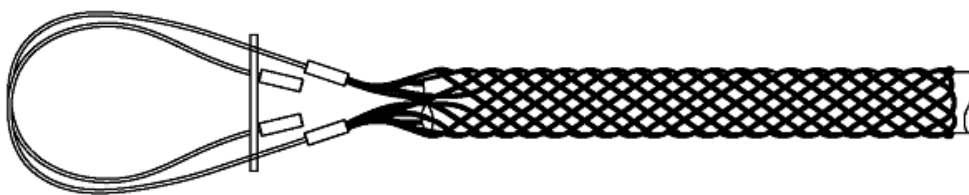

VIEW AFTER LOOPING ENDS INTO PLATE

Slingco Part No.	Range (mm)	Range (in)	Bale Length (mm)	Bale Length (in)	Mesh Length (mm)	Mesh Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)	Wire Material	Wire Material
ZCS8588	5.6 - 8.1	0.22 - 0.32	305	12	89	3.5	498	1100	Galvanised	Galvanized
ZCS8589	7.5 - 10.9	0.30 - 0.43	305	12	114	4.5	498	1100	Galvanised	Galvanized
ZCS8590	10.4 - 14.2	0.41 - 0.56	305	12	127	5.0	498	1100	Galvanised	Galvanized
ZCS8591	13.5 - 18.5	0.53 - 0.73	381	15	165	6.5	498	1100	Galvanised	Galvanized
ZCS8592	18 - 22	0.70 - 0.85	406	16	216	8.5	861	1900	Galvanised	Galvanized
ZCS8593	21 - 25	0.82 - 1.0	406	16	216	8.5	861	1900	Galvanised	Galvanized
ZCS8594	24 - 32	0.96 - 1.25	432	19	279	11	861	1900	Galvanised	Galvanized

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478