

# PULLING HARNESSES

## ⚠ WARNING


Cancer and Reproductive Harm: [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



## KEY FEATURES

- ✓ For simultaneous pulling multiple conductors
- ✓ Helps to minimise the size of the pulling bundle
- ✓ Available in 3 or 4 leg versions

This staggered pulling sling is designed to allow the pulling of multiple conductors at the same time while minimising the overall diameter of your pulling bundle. Pulling slings come in three leg or four leg versions. Use a swivel for each leg and at the head of the sling to release torsion, allowing conductors to rotate freely. Suggested swivels are listed with each model.

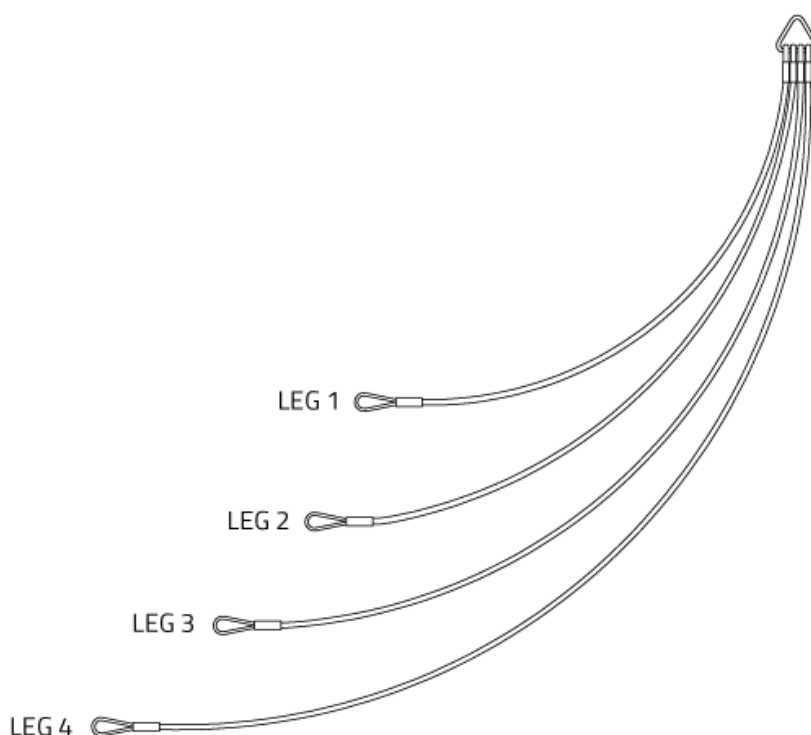

## GET IN TOUCH

☎ 01706 855 558

✉ [sales@slingco.com](mailto:sales@slingco.com)

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558  
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

# PULLING HARNESSES

| Slingco Part No. | Leg 1 Length (mm) | Leg 1 Length (in) | Leg 2 Length (mm) | Leg 2 Length (in) | Leg 3 Length (mm) | Leg 3 Length (in) | Leg 4 Length (mm) | Leg 4 Length (in) | Head of Sling Swivel Suggestion | Leg Swivel Suggestion |
|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|---------------------------------|-----------------------|
| ZSH2264          | 520               | 20.5              | 880               | 34.65             | 1,340             | 52.75             | n/a               | n/a               | ZSW2092                         | ZSW2091               |
| ZSH2265          | 520               | 20.5              | 880               | 34.65             | 1,340             | 52.75             | 1,760             | 69.3              | ZSW2092                         | ZSW2092               |

Minimum break load – 5,000 lb

## Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

## Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



## GET IN TOUCH

☎ 01706 855 558

✉ [sales@slingco.com](mailto:sales@slingco.com)

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558  
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478