

REINFORCED EYE UNDERGROUND CABLE SOCKS

⚠ WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov




KEY FEATURES


- ✓ Reinforced Eye
- ✓ Coated Wire
- ✓ Expanded Range

This line of cable socks is specially designed for underground applications. The eye is enclosed in an aluminium tube which provides added support when running within conduit and trenches. Plus these underground pulling socks are made from coated airline wire for added strength and flexibility.

Models WITH Swivel Connector



Models WITHOUT Swivel Connector

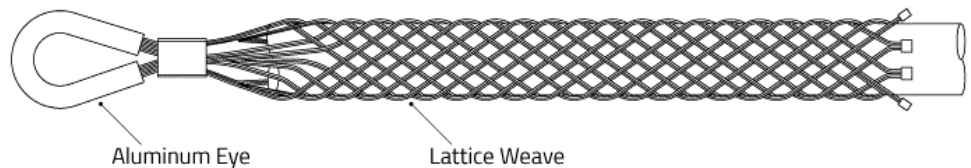

SINGLE EYE SINGLE / DOUBLE WEAVE PVC COATED GALVANIZED - 6 - 13MM (0.25 - 0.50")

Slingco Part no.	Range mm (in)	Weave (Coated Galv. wire)	Lattice Length mm (in)	Eye Opening mm (in)	Approx. break kg (lbs)
ZCS6355	6 - 13 (0.25-0.50)	Single	457 (18)	18 (0.70)	680 (1,500)
ZCS6356	6 - 13 (0.25-0.50)	Single	610 (24)	18 (0.70)	680 (1,500)
ZCS6357	6 - 13 (0.25-0.50)	Double uncoated	457 (18)	18 (0.70)	1,588 (3,500)
ZCS6358	6 - 13 (0.25-0.50)	Double uncoated	610 (24)	18 (0.70)	1,588 (3,500)
ZCS8717	6 - 13 (0.25-0.50)	Triple	610 (24)	Swivel Connector	1,814 (4,000)



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

REINFORCED EYE UNDERGROUND CABLE SOCKS

SINGLE EYE SINGLE / DOUBLE / TRIPLE WEAVE PVC COATED GALVANIZED - 13 - 19MM (0.50 - 0.75")

Slingco Part no.	Range mm (in)	Weave (Coated Galv. wire)	Lattice Length mm (in)	Eye Opening mm (in)	Approx. break kg (lbs)
ZCS6359	13 - 19 (0.50-0.75)	Single	457 (18)	18 (0.70)	680 (1,500)
ZCS6360	13 - 19 (0.50-0.75)	Single	610 (24)	18 (0.70)	680 (1,500)
ZCS6361	13 - 19 (0.50-0.75)	Double uncoated	457 (18)	18 (0.70)	1,814 (4,000)
ZCS6362	13 - 19 (0.50-0.75)	Double uncoated	610 (24)	18 (0.70)	1,814 (4,000)
ZCS6363	13 - 19 (0.50-0.75)	Triple	305 (12)	22 (0.87)	2,359 (5,200)
ZCS6364	13 - 19 (0.50-0.75)	Triple	457 (18)	22 (0.87)	2,359 (5,200)
ZCS6365	13 - 19 (0.50-0.75)	Triple	610 (24)	22 (0.87)	2,359 (5,200)
ZCS6366	13 - 19 (0.50-0.75)	Triple	914 (36)	22 (0.87)	2,359 (5,200)
ZCS8718	13 - 19 (0.50-0.75)	Triple	610 (24)	Swivel Connector	3,785 (8,480)

SINGLE EYE SINGLE / DOUBLE / TRIPLE WEAVE PVC COATED GALVANIZED - 19-32MM)

Slingco Part no.	Range mm (in)	Weave (Coated Galv. wire)	Lattice Length mm (in)	Eye Opening mm (in)	Approx. break kg (lbs)
ZCS6367	19 - 32 (0.75-1.25)	Single	457 (18)	22 (0.87)	1,361 (3,000)
ZCS6368	19 - 32 (0.75-1.25)	Single	610 (24)	22 (0.87)	1,361 (3,000)
ZCS6369	19 - 32 (0.75-1.25)	Double	457 (18)	22 (0.87)	2,722 (6,000)
ZCS6370	19 - 32 (0.75-1.25)	Double	610 (24)	22 (0.87)	2,722 (6,000)
ZCS6371	19 - 32 (0.75-1.25)	Triple	457 (18)	22 (0.87)	3,402 (7,500)
ZCS6372	19 - 32 (0.75-1.25)	Triple	610 (24)	22 (0.87)	4,537 (10,000)
ZCS8719	19 - 32 (0.75-1.25)	Triple	650 (25.5)	Swivel Connector	2,722 (6,000)

SINGLE EYE TRIPLE WEAVE PVC COATED GALVANIZED - 32 - 124MM (1.25 - 4.88")

Slingco Part no.	Range mm (in)	Weave (Coated Galv. wire)	Lattice Length mm (in)	Eye Opening mm (in)	Approx. break kg (lbs)
ZCS6373	32 - 51 (1.25-2.0)	Triple	660 (26)	36 (1.42)	3,402 (7,500)
ZCS6374	32 - 51 (1.25-2.0)	Triple	813 (32)	36 (1.42)	4,764 (10,500)
ZCS8720	19 - 32 (0.75-1.25)	Triple	762 (30)	Swivel Connector	4,764 (10,500)
ZCS6375	51 - 70 (2.0-2.75)	Triple	813 (32)	48.5 (1.91)	4,764 (10,500)
ZCS6376	51 - 70 (2.0-2.75)	Triple	965 (38)	48.5 (1.91)	6,125 (13,500)
ZCS8721	51 - 70 (2.0-2.75)	Triple	914 (36)	Swivel Connector	6,125 (13,500)
ZCS6377	70 - 89 (2.75-3.5)	Triple	965 (38)	48.5 (1.91)	6,125 (13,500)
ZCS6378	70 - 89 (2.75-3.5)	Triple	1,168 (46)	48.5 (1.91)	7,486 (16,500)
ZCS8722	70 - 89 (2.75-3.5)	Triple	914 (36)	Swivel Connector	7,486 (16,500)
ZCS6379	89 - 108 (3.5-4.25)	Triple	1,168 (46)	48.5 (1.91)	7,486 (16,500)
ZCS6380	89 - 108 (3.5-4.25)	Triple	1,321 (52)	48.5 (1.91)	8,847 (19,500)
ZCS8723	89 - 108 (3.5-4.25)	Triple	914 (36)	Swivel Connector	8,847 (19,500)
ZCS6381	108 - 124 (4.25-4.87)	Triple	1,321 (52)	48.5 (1.91)	8,167 (18,000)
ZCS6382	108 - 124 (4.25-4.87)	Triple	1,473 (58)	48.5 (1.91)	8,847 (19,500)
ZCS8724	108 - 124 (4.25-4.87)	Triple	1,030 (40.6)	Swivel Connector	9,375 (21,000)

SINGLE EYE SINGLE / DOUBLE WEAVE PVC COATED GALVANIZED - 0.25 - 0.50" (6 - 13mm)

Slingco Part No.	Weave (Coated Galv. Wire)	Range in (mm)	Lattice Length in (mm)	Eye Opening in (mm)	Approx. Break lbs (kg)
ZCS6355	Single	0.25-0.50 (6 - 13)	18 (457)	0.70 (18)	1,500 (680)
ZCS6356	Single	0.25-0.50 (6 - 13)	24 (610)	0.70 (18)	1,500 (680)
ZCS6357	Double uncoated	0.25-0.50 (6 - 13)	18 (457)	0.70 (18)	1,588 (3,500)
ZCS6358	Double uncoated	0.25-0.50 (6 - 13)	24 (610)	0.70 (18)	1,588 (3,500)
ZCS8717	Triple	0.25-0.50 (6 - 13)	24 (610)	Swivel Connector	4,000 (1,814)



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

REINFORCED EYE UNDERGROUND CABLE SOCKS

SINGLE EYE SINGLE / DOUBLE / TRIPLE WEAVE PVC COATED GALVANIZED - 0.50 - 0.75" (13 - 19MM)

Slingco Part No.	Weave (Coated Galv. Wire)	Range in (mm)	Lattice Length in (mm)	Eye Opening in (mm)	Approx. Break lbs (kg)
ZCS6359	Single	0.50-0.75 (13 - 19)	18 (457)	0.70 (18)	1,500 (680)
ZCS6360	Single	0.50-0.75 (13 - 19)	24 (610)	0.70 (18)	1,500 (680)
ZCS6361	Double uncoated	0.50-0.75 (13 - 19)	18 (457)	0.70 (18)	4,000 (1,814)
ZCS6362	Double uncoated	0.50-0.75 (13 - 19)	24 (610)	0.70 (18)	4,000 (1,814)
ZCS6363	Triple	0.50-0.75 (13 - 19)	12 (305)	0.87 (22)	5,200 (2,359)
ZCS6364	Triple	0.50-0.75 (13 - 19)	18 (457)	0.87 (22)	5,200 (2,359)
ZCS6365	Triple	0.50-0.75 (13 - 19)	24 (610)	0.87 (22)	5,200 (2,359)
ZCS6366	Triple	0.50-0.75 (13 - 19)	36 (914)	0.87 (22)	5,200 (2,359)
ZCS8718	Triple	0.50-0.75 (13 - 19)	24 (610)	Swivel Connector	8,480 (3,785)

SINGLE EYE SINGLE / DOUBLE / TRIPLE WEAVE PVC COATED GALVANIZED - 0.75 - 1.25" (19-32MM)

Slingco Part No.	Weave (Coated Galv. Wire)	Range in (mm)	Lattice Length in (mm)	Eye Opening in (mm)	Approx. Break lbs (kg)
ZCS6367	Single	0.75-1.25 (19 - 32)	18 (457)	0.87 (22)	3,000 (1,361)
ZCS6368	Single	0.75-1.25 (19 - 32)	24 (610)	0.87 (22)	3,000 (1,361)
ZCS6369	Double	0.75-1.25 (19 - 32)	18 (457)	0.87 (22)	6,000 (2,722)
ZCS6370	Double	0.75-1.25 (19 - 32)	24 (610)	0.87 (22)	6,000 (2,722)
ZCS6371	Triple	0.75-1.25 (19 - 32)	18 (457)	0.87 (22)	7,500 (3,402)
ZCS6372	Triple	0.75-1.25 (19 - 32)	24 (610)	0.87 (22)	10,000 (4,537)
ZCS8719	Triple	0.75-1.25 (19 - 32)	25.5 (650)	Swivel Connector	6,000 (2,722)

SINGLE EYE TRIPLE WEAVE PVC COATED GALVANIZED - 1.25 - 4.88" (32 - 124MM)

Slingco Part No.	Weave (Coated Galv. Wire)	Range in (mm)	Lattice Length in (mm)	Eye Opening in (mm)	Approx. Break lbs (kg)
ZCS6373	Triple	1.25-2.0 (32 - 51)	26 (660)	1.42 (36)	7,500 (3,402)
ZCS6374	Triple	1.25-2.0 (32 - 51)	32 (813)	1.42 (36)	10,500 (4,764)
ZCS8720	Triple	1.25-2.0 (32 - 51)	30 (762)	Swivel Connector	10,500 (4,764)
ZCS6375	Triple	2.0-2.75 (51 - 70)	32 (813)	1.91 (48.5)	10,500 (4,764)
ZCS6376	Triple	2.0-2.75 (51 - 70)	38 (965)	1.91 (48.5)	13,500 (6,125)
ZCS8721	Triple	2.0-2.75 (51 - 70)	36 (914)	Swivel Connector	13,500 (6,125)
ZCS6377	Triple	2.75-3.5 (70 - 89)	38 (965)	1.91 (48.5)	13,500 (6,125)
ZCS6378	Triple	2.75-3.5 (70 - 89)	46 (1,168)	1.91 (48.5)	16,500 (7,486)
ZCS8722	Triple	2.75-3.5 (70 - 89)	36 (914)	Swivel Connector	16,500 (7,486)
ZCS6379	Triple	3.5-4.25 (89 - 108)	46 (1,168)	1.91 (48.5)	16,500 (7,486)
ZCS6380	Triple	3.5-4.25 (89 - 108)	52 (1,321)	1.91 (48.5)	19,500 (8,847)
ZCS8723	Triple	3.5-4.25 (89 - 108)	36 (914)	Swivel Connector	19,500 (8,847)
ZCS6381	Triple	4.25-4.87 (108 - 124)	52 (1,321)	1.91 (48.5)	18,000 (8,167)
ZCS6382	Triple	4.25-4.87 (108 - 124)	58 (1,473)	1.91 (48.5)	19,500 (8,847)
ZCS8724	Triple	4.25-4.87 (108 - 124)	40.6 (1,030)	Swivel Connector	21,000 (9,375)

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com