


UNIVERSAL EYE SPLIT MESH ROD CLOSING CABLE SUPPORT SOCKS

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov

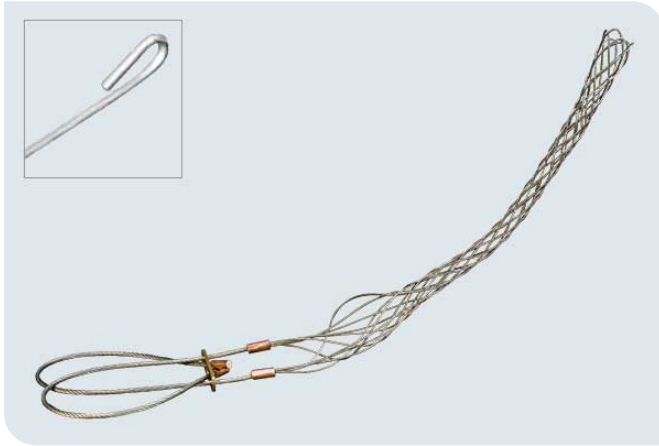

KEY FEATURES

- ✓ Made from 304 stainless steel
- ✓ Designed with adjustable universal eye
- ✓ Use when the end of the cable is not accessible

Fitted with an adjustable eye for easy and secure attachment, where the end of the cable is not accessible.
Made from 304 Stainless Steel.

Slingco Part No.	Approx. Break Load (kg)	Approx. Break Load (lb)	Lattice Length (mm)	Lattice Length (in)	Range (mm)	Range (in)
ZCS2683	240	530	216	8.5	12 - 16	0.50 - 0.63
ZCS2684	360	790	216	8.5	16 - 19	0.63 - 0.75
ZCS2685	460	1,020	267	10.5	19 - 25	0.75 - 1.00
ZCS2686	730	1,610	317	12.5	25 - 31	1.00 - 1.25
ZCS2687	730	1,610	368	14.5	31 - 38	1.25 - 1.50
ZCS2688	730	1,610	394	15.5	38 - 44	1.50 - 1.75

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5- 1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478