

HOSE WHIPCHECK

⚠ WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov




KEY FEATURES

- ✓ Easy to install
- ✓ Low cost safety solution
- ✓ For air hoses up to 200psi (5 to 1 safety factor)

Prevent damage or injury from whipping action should an air hose disengage from coupling. The strong steel cable prevents hose-whip accidents in the event of hose or coupling failure.

Easily fitted spring loaded loops grip the hose firmly. Select the hose whipcheck that matches your air hose diameter. For hose diameters from 1/4" to 3".

Installation is quick and easy and once installed provides peace of mind.

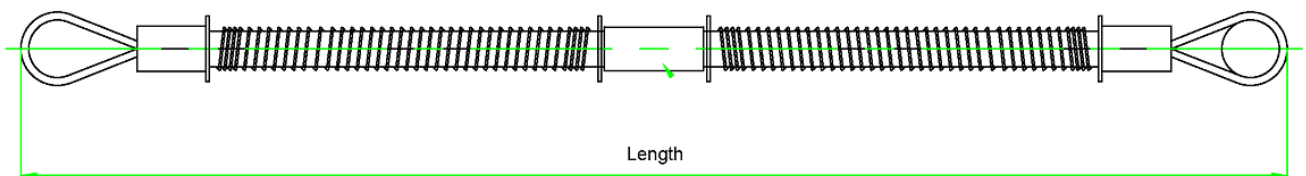

Slingco Part No.	Hose Range in (mm)	Wire Thickness mm	Length in (mm)	Material	Max WP Psi	WLL kN
ZWR14271	3/8 - 1 1/4 (10-32)	3.5	22 (550)	Galvanized	200	6.5
ZWR11534	1/2 - 1 1/4 (13-32)	3	22 (550)	Galvanized	200	5.7
ZWR11530	1/2 - 1 1/4 (13-32)	3	22 (550)	Stainless Steel	200	5.7
ZWR14272	1 1/4 - 2 (32 - 50)	6	33 (850)	Galvanized	200	17.6
ZWR11535	1 1/2 - 3.0 (38-76)	6	42 (1060)	Galvanized	200	21.2
ZWR14273	2 1/2 - 4 (63 - 100)	6	45 (1150)	Galvanized	200	17.6
ZWR14274	4 - 6 (100 - 150)	10	45 (1150)	Galvanized	200	49.0

Dimensions



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

HOSE WHIPCHECK

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478