

ANTI-ROTATIONAL DEVICE (ARD)

⚠ WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov




KEY FEATURES

- ✓ Stops cables from twisting as they pass over pulling blocks
- ✓ Suitable for fibre optic and OPGW cable
- ✓ Prevents irreparable damage to delicate fibre optics caused by cable twists during installation
- ✓ Travel easily over pulling blocks

The Anti-Rotational Device prevents cables from twisting as they travel over pulling blocks. Left uncontrolled, the optical cable's delicate glass fibres could be permanently damaged during installation.

Weighted attachments hang down while stringing, keeping the ARD vertical to stop cable rotation. These attachments then collapse in line, enabling them to travel easily over pulling blocks.

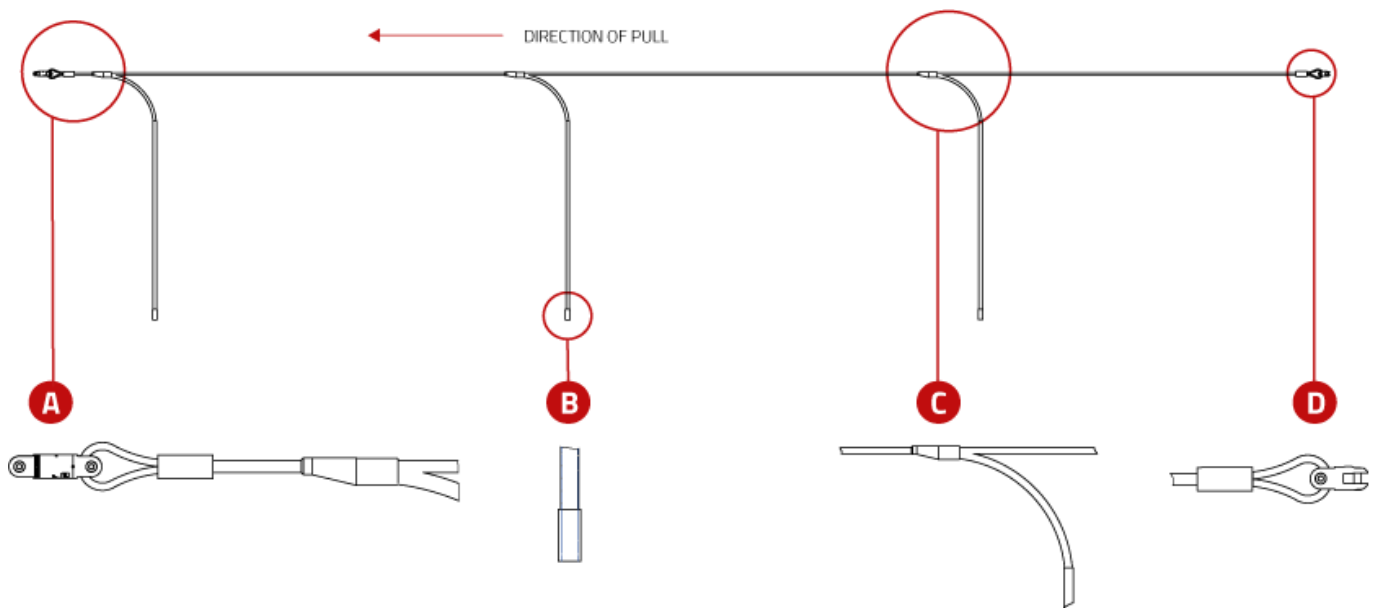

GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

ANTI-ROTATIONAL DEVICE (ARD)

Slingco Part No.	Overall Length (in)	Overall Length Approx (mm)	Approx Working load @3:1 Safety Factor (lb)	Working Load @3:1 Safety Factor (kg)	Length of Attachments Approx. (mm)	Length of Attachments Approx (in)	Weight of each Attachment (kg)	Weight of each Attachment (lb)
ZAD3799	348	8839	5,000	2268	2438	96	6.35	14

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478