

BUS DROP CABLE GRIPS

WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Lightweight application
- ✓ Reduces strain on electrical connections
- ✓ Available in Galvanised or Stainless Steel Wire

Lightweight easy to use Bus Drop Grips are perfect for supporting cables in such applications as data centres, control centres and other wiring-to-rack applications. Available in Galvanised or Stainless Steel.

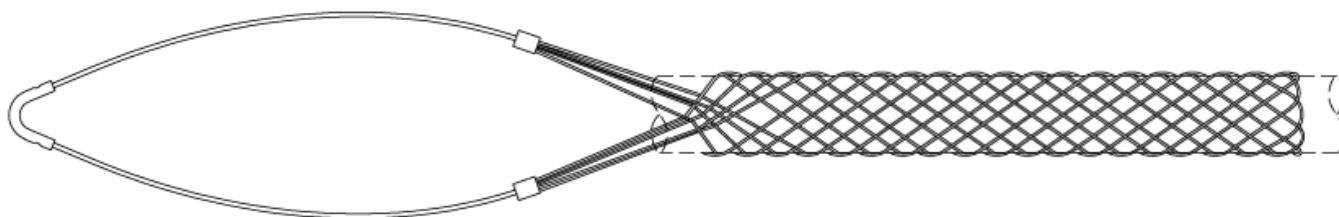

GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

BUS DROP CABLE GRIPS

Slingco Part No.	Range (mm)	Range (in)	Wire Material	Wire Material	Eye Length (mm)	Eye length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS6969	6.1 - 8.1	0.22 - 0.32	Galvanised	Galvanized	88.9	3.5	158	350
ZCS6970	8.1 - 10.9	0.30 - 0.43	Galvanised	Galvanized	101.6	4	204	450
ZCS6971	10.9 - 14.2	0.41 - 0.56	Galvanised	Galvanized	120.6	4.75	249	550
ZCS6972	14.2 - 18.5	0.53 - 0.73	Galvanised	Galvanized	152.4	6	453	1,000
ZCS6973	18.5 - 21.6	0.70 - 0.85	Galvanised	Galvanized	171.4	6.75	635	1,400
ZCS6974	21.6 - 25.4	0.82 - 1.00	Galvanised	Galvanized	203.2	8	635	1,400
ZCS6975	25.4 - 31.7	0.96 - 1.25	Galvanised	Galvanized	241.3	9.5	680	1,500
ZCS09744	6.1 - 8.1	0.22 - 0.32	304 Stainless Steel	304 Stainless Steel	88.9	3.5	45.36	100
ZCS09745	8.1 - 10.9	0.30 - 0.43	304 Stainless Steel	304 Stainless Steel	101.6	4	117.9	260
ZCS09746	10.9 - 14.2	0.41 - 0.56	304 Stainless Steel	304 Stainless Steel	120.6	4.75	249	550
ZCS09717	14.2 - 18.5	0.53 - 0.73	304 Stainless Steel	304 Stainless Steel	152.4	6	453	1,000
ZCS09747	18.5 - 21.6	0.70 - 0.85	304 Stainless Steel	304 Stainless Steel	171.4	6.75	635	1,400
ZCS09748	21.6 - 25.4	0.82 - 1.00	304 Stainless Steel	304 Stainless Steel	203.2	8.0	635	1,400
ZCS09749	25.4 - 31.7	0.96 - 1.25	304 Stainless Steel	304 Stainless Steel	241.3	9.5	680	1,400
ZCS09968	10.9 - 14.2	0.41 - 0.56	ALL 316 Stainless Steel	ALL 316 Stainless Steel	120.6	4.75	249	550
ZCS09969	14.2 - 18.5	0.53 - 0.73	ALL 316 Stainless Steel	ALL 316 Stainless Steel	152.4	6	453	1,000
ZCS10400	18.5 - 21.6	0.70 - 0.85	ALL 316 Stainless Steel	ALL 316 Stainless Steel	171.4	6.75	635	1,400
ZCS10401	21.6 - 25.4	0.82 - 1.00	ALL 316 Stainless Steel	ALL 316 Stainless Steel	203.2	8.0	635	1,400

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478