

DE TYPE

WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Available in galvanised steel or stainless steel
- ✓ Suitable for underground installations
- ✓ Fits easily onto electrical cables

Ideal for pulling light to medium loads; the main advantage over the single eye cable grip is the cable being pulled can be passed through the grip, several cable grips can be used to support over a calculated distance.

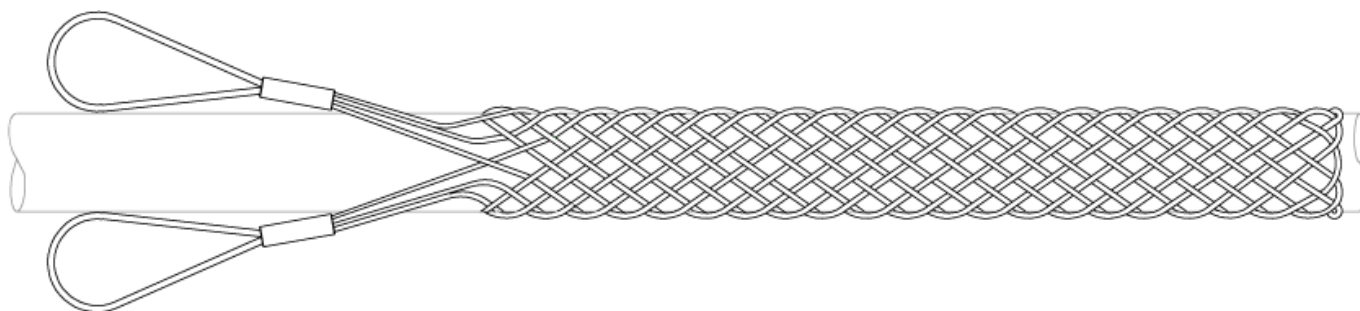

GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

DE TYPE

Double Eye Standard Grip - Galvanised

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Lattice Weave	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS0305	6 - 13	0.25 - 0.50	230	9	Single	305	12	760	1,680
ZCS0306	13 - 19	0.50 - 0.75	355	14	Single	430	17	1,015	2,240
ZCS0307	19 - 25	0.75 - 1.00	405	16	Single	510	20	2,540	5,600
ZCS0308	25 - 38	1.00 - 1.50	455	18	Single	610	24	3,555	7,840
ZCS0309	38 - 50	1.50 - 2.00	535	21	Double	735	29	5,080	11,200
ZCS0310	50 - 63	2.00 - 2.50	610	24	Double	865	34	5,080	11,200
ZCS0311	63 - 89	2.50 - 3.50	685	27	Double	990	39	6,095	13,440
ZCS0312	89 - 115	3.50 - 4.50	685	27	Double	990	39	7,110	15,680
ZCS0878	115 - 140	4.50 - 5.50	685	27	Double	990	39	7,110	15,680
ZCS3579	135 - 160	5.31 - 6.30	1,000	39.37	Double	1,600	63	20,000	44,800
ZCS3580	161 - 190	6.33 - 7.48	1,500	59.05	Double	2,100	82.67	27,000	60,480
ZCS3581	191 - 220	7.51 - 8.66	1,500	59.05	Double	2,100	82.67	27,000	60,480
ZCS3582	221 - 250	8.70 - 9.84	1,500	59.05	Double	2,100	82.67	27,000	60,480

Double Eye Standard Grip - 316 Stainless Steel

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Lattice Weave	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS0823	6 - 13	0.25 - 0.50	230	9	Single	305	12	610	1,344
ZCS1007	13 - 19	0.50 - 0.75	355	14	Single	430	17	810	1,792
ZCS0931	19 - 25	0.75 - 1.00	405	16	Single	510	20	2,030	4,480
ZCS1265	25 - 38	1.00 - 1.50	455	18	Single	610	24	2,845	6,272
ZCS3995	29 - 40	1.14 - 1.57	1,270	50	Double	1,575	62	15,625	35,000
ZCS1252	38 - 50	1.50 - 2.00	535	21	Double	735	29	4,065	8,960
ZCS0319	50 - 63	2.00 - 2.50	610	24	Double	865	34	4,065	8,960
ZCS0213	63 - 89	2.50 - 3.50	685	27	Double	990	39	4,875	10,752
ZCS4873	63 - 89	2.50 - 3.50	1,778	70	Double	2,032	80	6,027	13,500
ZCS4596	63 - 89	2.50 - 3.50	1,422	56	Triple	3,860	152	7,204	16,138
ZCS0332	89 - 115	3.50 - 4.50	685	27	Double	990	39	5,690	12,544
ZCS1982	115 - 140	4.50 - 5.50	685	27	Double	990	39	5,690	12,544
ZCS4869	115 - 140	4.50 - 5.50	1,778	70	Double	2,032	80	6,027	13,500

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com