

DRIVE WRENCH ASSEMBLY

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ System Component Options:
- ✓ Orange Drive Wrench (#SAE09639)
- ✓ Yellow Drive Wrench (#SAE08666)
- ✓ Drive Wrench Lock (#SAE10425)
- ✓ 1.5 in Square Shank Bolted Assembly (#SAE13513)
- ✓ 2.5 in Hex Kelly Bar Adapter (#SAE10486)
- ✓ 2.625 in Hex Kelly Bar Adapter (#SAE10427)
- ✓ 1.5 in Square Shank Anchor Tool (#SAE11132)

10K Drive Wrench Assembly for installation of screw anchors. The complete tool system includes Drive Wrench options, Wrench Locks, and Adapters.

Slingco's Hex Kelly Bar Adapters are a key component in the Drive Wrench Assembly. The adapters are used to connect the Drive Wrench Lock Assembly to the Kelly Bar of the bucket truck. There are two versions available which fit the most common drive bar dimensions.

Slingco's Drive Wrench Lock Assembly attaches to the adapter and makes the installation of the anchor rod much easier. The three-position rings allow for easy capture of the Drive Wrench and the anchor rod, holding them securely while under torque, and releasing each when needed.

Slingco offers a 1.5" square adapter and bolted assembly for 1.5" square screw anchors.

Slingco's Drive Wrenches are designed to allow anchor rods to telescope inside them, and secure to the Drive Wrench Lock Assembly. The Drive Wrench transfers the torque from the drive motor to the screw anchor. Rated to 10,000 ft-lb of torque, Slingco's Drive Wrenches are designed to handle anchor installation in demanding environments.




GET IN TOUCH

 01706 855 558

 sales@slingco.com

DRIVE WRENCH ASSEMBLY

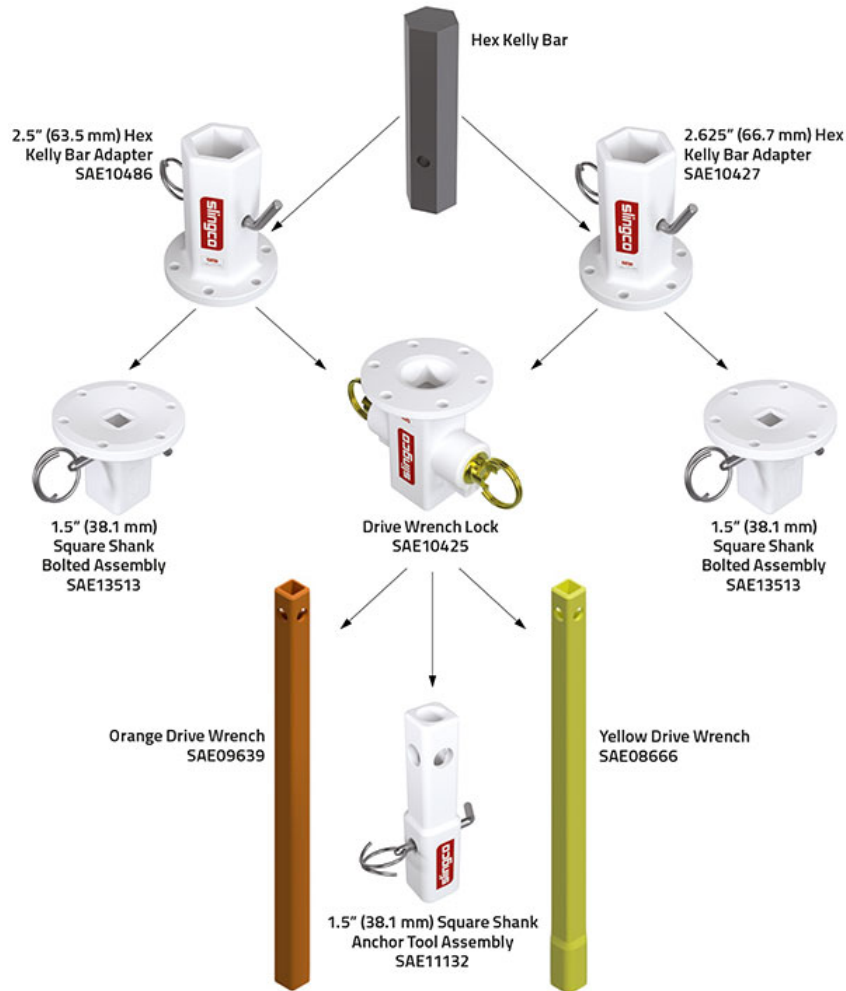

Slingco Part No.	Assembly Part	Description
SAE09639	Orange Drive Wrench	10,000ft-lb Drive Wrench
SAE08666	Yellow Drive Wrench	10,000ft-lb Drive Wrench
SAE10425	Drive Wrench Lock	7.5" (190.5mm) height
SAE10486	Hex Kelly Bar Adapter	2.5"x2.5" (63.5mmx63.5mm)
SAE10427	Hex Kelly Bar Adapter	2.625"x2.625" (66.68mmx66.68mm)
SAE11132	Square Shank Anchor Tool Assembly	1-1/2" square (38.1mm square)
SAE13513	Square Shank Bolted Assembly	1-1/2" square (38.1mm square)

Slingco Part No.	Kelly Bar Shape	Size (in)	Size (mm)	Height (in)	Height (mm)	Weight (lb)	Weight (kg)
SAE10486	HEX	2.5	63.5	8.25	210	16.3	7.39
SAE10427	HEX	2.625	66.7	8.25	210	16.7	7.57

Slingco Part No.	Description	Hub Size (in)	Hub Size (mm)	Shaft Size (in)	Shaft Size (mm)	Weight (lb)	Weight (kg)
SAE09639	Orange	2.25	57	1.375	35	57	28.85
SAE08666	Yellow	2.5	63.5	1.5	38	57	28.85
SAE11132	Square Shank	N/A	N/A	1.5	38.1		



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

DRIVE WRENCH ASSEMBLY

Components

Slingco Part No.	Weight (lb)	Weight (kg)	Height (in)	Height (mm)
SAE10425	18.4	8.35	7.5	190.5

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478