

FLEXIBLE & THIMBLE EYE CABLE GRIPS - DOUBLE EYE

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov




KEY FEATURES

- ✓ Specifically designed for metric sized cable
- ✓ Available with soft or reinforced eye
- ✓ Longer lattice length

Designed to fit the typical European range of cables, and with a longer lattice length, these grips are ideal for pulling medium to heavy loads. Made of galvanised steel.

This grip has a double eye construction allowing the cables being pulled to pass through the grip. Available with flexible eye or reinforced thimble eye.

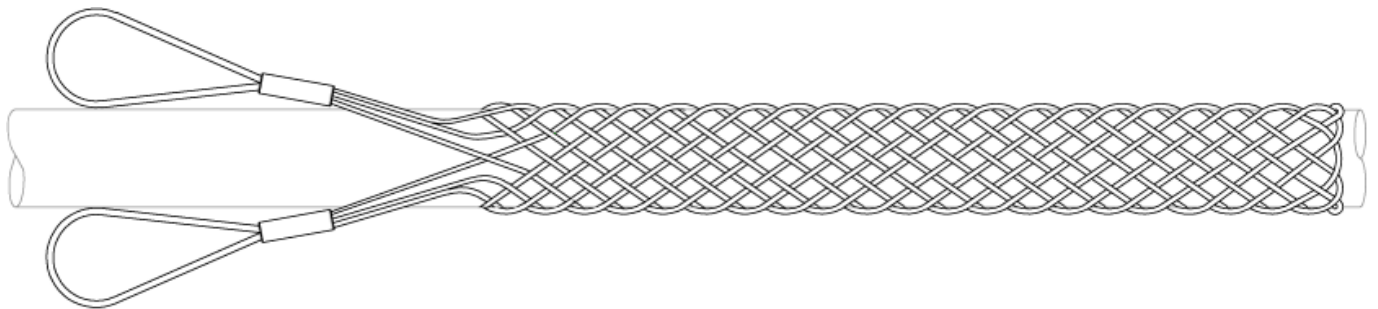

GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

FLEXIBLE & THIMBLE EYE CABLE GRIPS - DOUBLE EYE

Flexible Eye	Thimble Eye	Type	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS0837	ZCS3146	Single	15 - 20	0.59 - 0.79	1,250	49	1,500	59	1,240	2,730
ZCS0838	ZCS3147	Single	20 - 30	0.79 - 1.18	1,250	49	1,500	59	1,530	3,370
ZCS0839	ZCS3148	Double	20 - 30	0.79 - 1.18	1,250	49	1,500	59	1,990	4,380
ZCS0840	ZCS3149	Single	30 - 40	1.18 - 1.57	1,250	49	1,500	59	2,550	5,620
ZCS0841	ZCS3150	Double	30 - 40	1.18 - 1.57	1,250	49	1,500	59	3,060	6,740
ZCS0842	ZCS3151	Double	40 - 50	1.57 - 1.97	1,500	59	1,750	69	5,930	13,060
ZCS0843	ZCS3152	Double	50 - 60	1.97 - 2.36	1,500	59	1,750	69	6,630	14,610
ZCS0844	ZCS3153	Double	60 - 70	2.36 - 2.76	1,500	59	1,750	69	7,790	17,160
ZCS0845	ZCS3154	Double	70 - 90	2.76 - 3.54	1,500	59	1,750	69	8,110	17,870
ZCS0847	ZCS3155	Double	90 - 110	3.54 - 4.33	1,500	59	1,750	69	11,830	26,070
ZCS0848	ZCS3156	Double	110 - 130	4.33 - 5.12	1,500	59	1,750	69	11,830	26,070
ZCS0849	ZCS3157	Double	120 - 150	4.72 - 5.91	1,500	59	1,750	69	12,750	28,100
ZCS0850	ZCS3158	Double	140 - 180	5.51 - 7.09	1,500	59	1,750	69	12,750	28,100

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com