

FLEXIBLE & THIMBLE EYE CABLE GRIPS - SINGLE EYE

⚠ WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov




KEY FEATURES

- ✓ Specifically designed for metric sized cable
- ✓ Available with soft or reinforced eye
- ✓ Longer lattice length

Designed to fit the typical European range of cables, and with a longer lattice length, these grips are ideal for pulling medium to heavy loads. Made of galvanised steel.

This grip has a flexible eye construction – and is also available with a reinforced thimble eye.

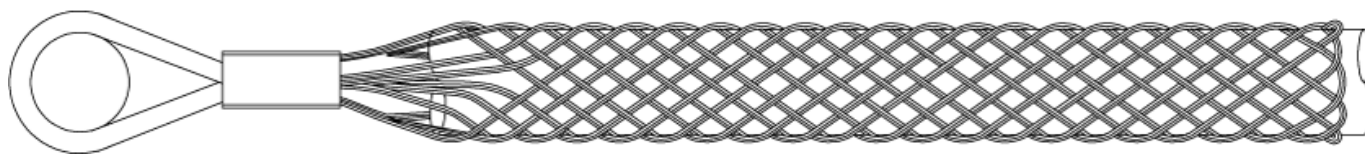

Flexible Eye	Thimble Eye	Type	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS0824	ZCS3133	Single	15 - 20	0.59 – 0.79	1,220	48	1,358	53.5	1,240	2,730
ZCS0825	ZCS3134	Single	20 - 30	0.79 – 1.18	1,250	49	1,358	53.5	1,530	3,370
ZCS0826	ZCS3135	Double	20 - 30	0.79 – 1.18	1,250	49	1,393	55	1,990	4,380
ZCS0827	ZCS3136	Single	30 - 40	1.18 – 1.57	1,250	49	1,393	55	2,550	5,620
ZCS0828	ZCS3137	Double	30 - 40	1.18 – 1.57	1,250	49	1,652	65	3,060	6,740
ZCS0829	ZCS3138	Double	40 - 50	1.57 – 2.00	1,500	59	1,661	65.5	5,930	13,060
ZCS0830	ZCS3139	Double	50 - 60	1.97 – 2.36	1,500	59	1,750	69	6,630	14,610
ZCS0831	ZCS3140	Double	60 - 70	2.36 – 2.76	1,500	59	1,750	69	7,790	17,160
ZCS0832	ZCS3141	Double	70 - 90	2.76 – 3.54	1,500	59	1,750	69	8,110	17,870
ZCS0833	ZCS3142	Double	90 - 110	3.54 – 4.33	1,500	59	1,750	69	11,830	26,070
ZCS0834	ZCS3143	Double	110 - 130	4.33 – 5.12	1,500	59	1,750	69	11,830	26,070
ZCS0835	ZCS3144	Double	120 - 150	4.72 – 5.91	1,500	59	1,750	69	12,750	28,100
ZCS0836	ZCS3145	Double	140 - 180	5.51 – 7.09	1,500	59	1,750	69	12,750	28,100



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

FLEXIBLE & THIMBLE EYE CABLE GRIPS - SINGLE EYE

Slingco Part No.	Range (mm)	Range	Lattice Length (mm)	Lattice Length	Approx. Break Load (kg)	Approx. Break Load
ZCS4783	60 - 70	2.36 - 2.75	1,096	43	7,790	17,450
ZCS4784	70 - 90	2.75 - 3.54	1,096	43	8,110	18,166
ZCS4785	90 - 110	3.54 - 4.33	1,096	43	11,830	26,500
ZCS4786	110 - 130	4.33 - 5.11	1,096	43	11,830	26,500
ZCS4787	120 - 150	4.72 - 5.90	1,096	43	12,750	28,560

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478