

HEAVY DUTY SUPPORT GRIPS – SINGLE EYE

⚠ WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle

Single Eye Heavy Duty Support Grips made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by utilities and contractors to support cables transitioning from overhead to underground. One may support multiple cables in one grip. The overall diameter of the cable bundle should fit within the listed range.

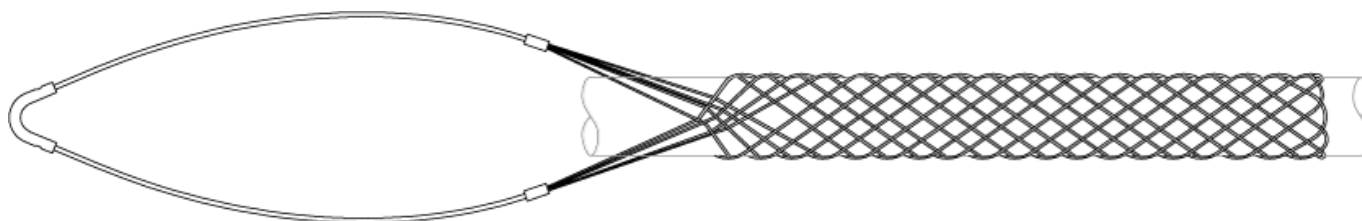

Slingco Part No.	Range (mm)	Range (in)	Approx. Break Load (kg)	Approx. Break Load (lb)	Lattice Length (mm)	Lattice Length (in)	Lattice Material
ZCS7065	13 - 16	0.50 - 0.63	621	1,370	254	10	Stainless Steel
ZCS7066	16 - 19	0.63 - 0.75	944	2,060	267	10.5	Stainless Steel
ZCS7067	19 - 25	0.75 - 1.00	944	2,060	343	13.5	Stainless Steel
ZCS7068	25 - 32	1.00 - 1.25	1,216	2,678	381	15	Stainless Steel
ZCS7069	32 - 38	1.25 - 1.50	2,037	4,490	445	17.5	Stainless Steel
ZCS7070	38 - 44	1.50 - 1.75	2,037	4,490	495	19.5	Stainless Steel
ZCS7071	44 - 51	1.75 - 2.00	2,269	5,000	533	21	Stainless Steel
ZCS7072	51 - 63	2.00 - 2.50	4,056	8,940	546	21.5	Stainless Steel
ZCS7073	63 - 76	2.50 - 3.00	4,056	8,940	572	22.5	Stainless Steel
ZCS7074	76 - 87	3.00 - 3.50	4,649	10,250	686	27	Stainless Steel
ZCS7075	87 - 102	3.50 - 4.00	6,089	13,420	826	32.5	Stainless Steel

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

HEAVY DUTY SUPPORT GRIPS – SINGLE EYE

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478