

NO TYPE

WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Continuous weave configuration
- ✓ No fraying wires
- ✓ Lighter and safer to handle
- ✓ Longer Life

Ideal for fibre optic, borehole cable installation, offshore or for a multitude of uses in industrial and electric cable applications; dramatically improved weight to break ratio. Slingco's non-metallic pulling grips are made of a high-strength, non-metallic aramid fibre, with UV protective coating; they are suitable for pulling both single cable and cable bundles. These woven mesh grips offer a non-metallic alternative to steel. Non-metallic material is easy to work with even without gloves.

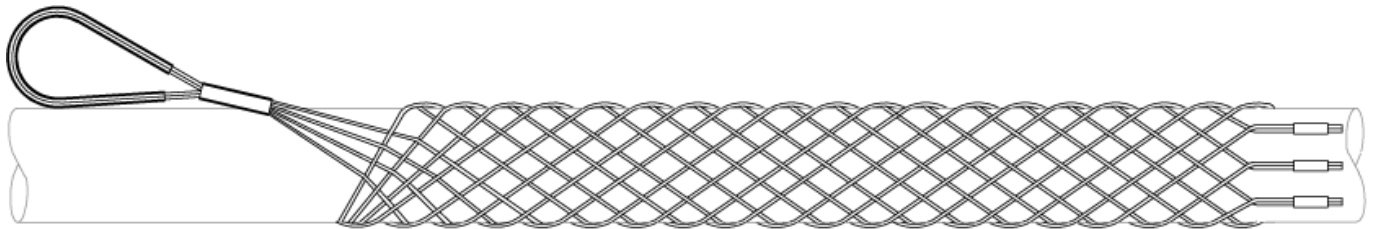

Single Offset Eye Single Weave Non-Metallic Grip

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS2810	10 - 20	0.38 - 0.75	535	21	1,115	2,460
ZCS2811	20 - 30	0.75 - 1.25	535	21	1,620	3,580
ZCS2921	25 - 38	1.00 - 1.50	584	23	1,620	3,580
ZCS2812	30 - 40	1.25 - 1.50	635	25	2,230	4,920
ZCS2813	40 - 50	1.50 - 2.00	535	21	2,640	5,820



GET IN TOUCH

 01706 855 558

 sales@slingco.com

NO TYPE

Single Offset Eye Double Weave Non-Metallic Grip

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS09342	13 - 25	0.5 - 1.00	990	39	3,671	8,093
ZCS2814	30 - 38	1.25 - 1.50	864	34	4,470	9,860
ZCS2815	38 - 50	1.50 - 2.00	635	25	5,390	11,880
ZCS2816	50 - 65	2.00 - 2.50	635	25	7,210	15,900
ZCS2817	65 - 76	2.50 - 3.00	667	26	7,210	15,900
ZCS2818	76 - 102	3.00 - 4.00	864	34	7,210	15,900

Single Offset Eye Extended Eye 12" Non-Metallic Grip

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS7053	13 - 16	0.50 - 0.63	610	24	363	800
ZCS7054	16 - 19	0.63 - 0.74	610	24	454	1,000
ZCS7055	19 - 25	0.75 - 1.00	610	24	544	1,200
ZCS7056	25 - 32	1.00 - 1.25	610	24	544	1,200

SINGLE OFFSET EYE LACE UP NON-METALLIC GRIP

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS09323	65 - 76	0.63 - 1.00	1,499	59	5,896	13,000
ZCS10476	76 - 102	3.00 - 3.50	762	30	2,268	5,000

Double Offset Eye Non-Metallic Grip

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS8176	65 - 76	2.50 - 3.00	991	39	3,629	8,000
ZCS09959	65 - 76	2.50 - 3.00	914	36	4,082	9,000
ZCS6823	76 - 102	3.00 - 4.00	838	33	4,082	9,000

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com