

OS TYPE

WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Available in galvanised steel or stainless steel
- ✓ Suitable for underground installations
- ✓ Fits easily onto electrical cables

Similar to the SE Type single eye cable grip, but for when offset positioning is required. Excellent for pulling slack out of lines that have been pulled. May also be used for removing underground cables when end of cable is available.

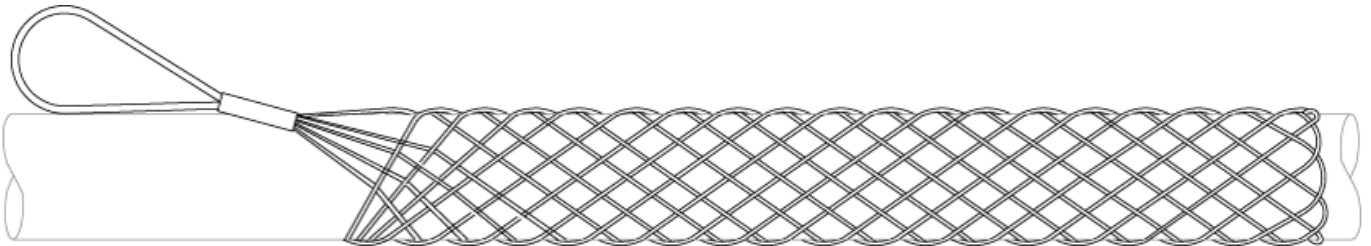

Offset Eye Standard Grip - Galvanised

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS1860	6 - 13	0.25 - 0.50	Single	230	9	305	12	760	1,680
ZCS1861	13 - 19	0.50 - 0.75	Single	355	14	430	17	1,015	2,240
ZCS1862	19 - 25	0.75 - 1.00	Single	405	16	510	20	2,540	5,600
ZCS1863	25 - 38	1.00 - 1.50	Single	455	18	610	24	3,555	7,837
ZCS1864	38 - 50	1.50 - 2.00	Double	535	21	735	29	5,080	11,200
ZCS1865	50 - 63	2.00 - 2.50	Double	610	24	865	34	5,080	11,200
ZCS1866	63 - 89	2.50 - 3.50	Double	685	27	990	39	6,095	13,440
ZCS1867	89 - 115	3.50 - 4.50	Double	685	27	990	39	7,110	15,680
ZCS1974	115 - 140	4.50 - 5.50	Double	685	27	990	39	7,110	15,680



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

OS TYPE

Offset Eye Standard Grip - 316 Stainless Steel

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS1986	6 - 13	0.25 - 0.50	Single	230	9	305	12	610	1,344
ZCS1987	13 - 19	0.50 - 0.75	Single	355	14	430	17	810	1,792
ZCS1988	19 - 25	0.75 - 1.00	Single	405	16	510	20	2,030	4,480
ZCS1989	25 - 38	1.00 - 1.50	Single	450	17.75	700	27.50	2,845	6,272
ZCS1990	38 - 50	1.50 - 2.00	Double	535	21	735	29	4,065	8,960
ZCS1991	50 - 63	2.00 - 2.50	Double	610	24	865	34	4,065	8,960
ZCS1992	63 - 89	2.50 - 3.50	Double	685	27	990	39	4,875	10,752
ZCS1993	89 - 115	3.50 - 4.50	Double	685	27	990	39	5,690	12,544
ZCS1994	115 - 140	4.50 - 5.50	Double	685	27	990	39	5,690	12,544
ZCS3994	140 - 180		Double	596		976		2,041	
ZCS4069	203 - 229	8.0 - 9.0	Double	1,500	59	1,880	74	8,928	20,000

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com