

R TYPE - ROTATING MULTI-WEAVE CABLE GRIPS

⚠ WARNING


Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Steel forged revolving head ideal for connecting to Slingco swivels
- ✓ Triple weave construction
- ✓ Used for heavy duty pulling
- ✓ Suitable for bare or insulated cable, conductor or wire
- ✓ Colour coded for easy identification

Like the MU type, the rotating eye grip has a multi-weave construction (triple, double, single) and is colour coded for ease of identification. The steel forged revolving head is ideal for connecting to Slingco swivels. Warning: The Slingco rotating eye does not revolve under load and does not replace the use of a line swivel. Recommended for underground pulls. Made of galvanised steel.

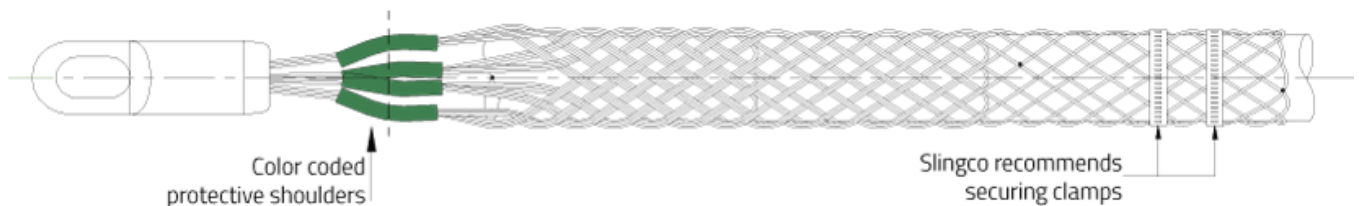

Slingco Part No.	Range (mm)	Range (in)	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)	Colour Code	Color Code
ZCS2177	6 - 12	0.25 - 0.50	720	28	3,175	7,000	Dark Green	Dark Green
ZCS2178	12 - 19	0.50 - 0.75	978	39	4,760	10,500	Brown	Brown
ZCS2179	19 - 25	0.75 - 1.00	1,199	47	6,395	14,100	Light Blue	Light Blue
ZCS2180	25 - 32	1.00 - 1.25	1,529	60	11,340	25,000	Gold	Gold
ZCS2181	32 - 38	1.25 - 1.50	1,289	51	14,061	31,000	Black	Black
ZCS2182	38 - 44	1.50 - 1.75	1,860	73	14,061	31,000	Red	Red
ZCS2183	44 - 57	1.75 - 2.25	1,747	69	19,505	43,000	Dark blue	Dark blue
ZCS2779	51 - 63	2.00 - 2.50	1,370	54	21,772	48,000	Yellow	Yellow
ZCS2780	63 - 76	2.50 - 3.00	1,311	52	21,772	48,000	Orange	Orange
ZCS2781	76 - 89	3.00 - 3.50	1,342	53	21,772	48,000	Aluminium	Aluminum
ZCS2782	89 - 102	3.50 - 4.00	1,351	54	21,772	48,000	Light Green	Light Green

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478

R TYPE - ROTATING MULTI-WEAVE CABLE GRIPS

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478