


RUBBER INSULATING BLANKETS

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov

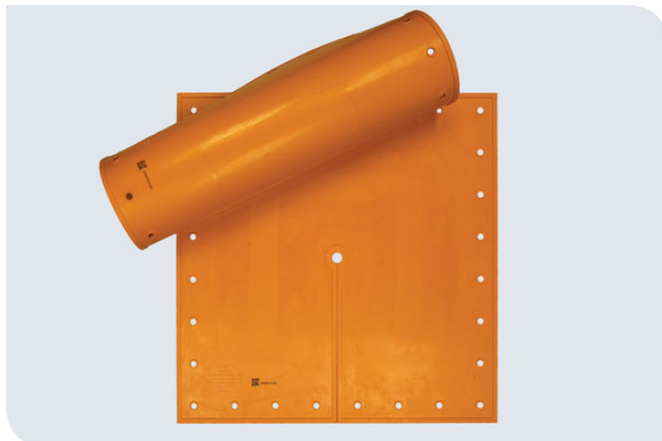

KEY FEATURES

- ✓ Protection up to 36KV
- ✓ Durable ozone resistant material
- ✓ Integrated eyelets for use with Slingco blanket magnets
- ✓ Compatible for use with Slingco blanket accessories

Slingco insulating blankets are designed to cover irregularly shaped energized equipment that cannot be properly protected with other devices.

They help prevent accidental contact with live conductors, apparatus, or circuits, and can be secured with blanket clamps, pins, or magnets. They are often used in place of insulator covers, cutout covers, line hose, and dead-end covers when a more adaptable protective solution is needed.

Designed for safety and durability, these blankets meet ASTM D1048 standards offering protection up to 36,000V AC.

Made from high-strength, ozone-resistant rubber, Slingco's Type II Blankets provide flexibility in extreme temperatures. These blankets enhance workplace safety by protecting against electrical arcs, shocks, and flashes, making them ideal for utility workers.

Slingco Part No.	Size in (mm)	Solid/Split	Type*	Class*	Style*
PPE08434	36 x 36 (910 x 910)	Solid	Type II	4	A
PPE08432	22 x 22 (560 x 560)	Solid	Type II	4	A
PPE09715	22 x 22 (560 x 560)	Split	Type II	4	A

*Type, Class, and Style are defined by ASTM D1048.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478