


ROPE TO SWIVEL CONNECTORS

⚠ WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov

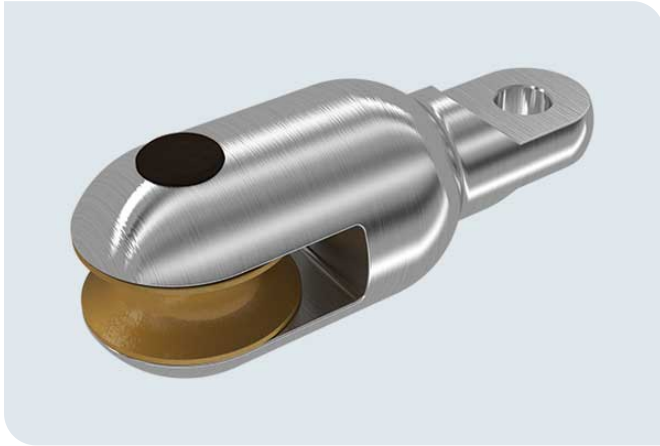

KEY FEATURES

- ✓ Fitted with high strength pins and smooth rollers
- ✓ No fraying or damage to the rope
- ✓ Fitted with high strength hex pins

Use to connect rope, swivels and other objects. With high strength pins and smooth rollers rope can be safely connected without fear of fraying or damage. The connectors have high strength hex pins. The rope to rope connector has two rollers to protect rope from becoming frayed.

Slingco Part No.	Safe working load (kg)	Safe working load (lb)	Max rope dia. (mm)	Max rope dia. (in)	A (mm)	A (in)	B (mm)	B (in)	C (mm)	C (in)	D (mm)	D (in)	E (mm)	E (in)	F (mm)	F (in)	Weight (kg)	Weight (lb)
ZSW6559	3,170	7,000	22.2	0.875	50.8	2	24	0.938	18	0.688	135	5.313	12.7	0.5	13.5	0.531	0.95	2.09
ZSW6560	6,800	15,000	22.2	0.875	50.8	2	24	0.938	18	0.688	137	5.313	16.7	0.656	18	0.75	1.15	2.54

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478