

LINE PULLING SWIVELS - HIGH LOAD

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov



KEY FEATURES

- ✓ Higher working load capacity for demanding pulls: 36,000 or 50,000 lb
- ✓ Helps protect conductors and pulling equipment
- ✓ Designed for overhead and underground applications
- ✓ Compatible with Slingco heavy duty grips
- ✓ Quality tested for dependable field performance

Slingco's High Load Line Pulling Swivels are engineered for the growing demands of modern transmission and reconductoring projects. These swivels are engineered for high-tension transmission and distribution pulling applications where higher working loads and dependable performance are critical.

Designed to release torsion during pulling operations, these swivels help reduce strain on conductors, grips, and pulling equipment for safer, more efficient installations. Suitable for overhead and underground applications, every swivel is quality tested and inspected to deliver dependable performance in demanding field conditions.




GET IN TOUCH

 01706 855 558

 sales@slingco.com

LINE PULLING SWIVELS - HIGH LOAD

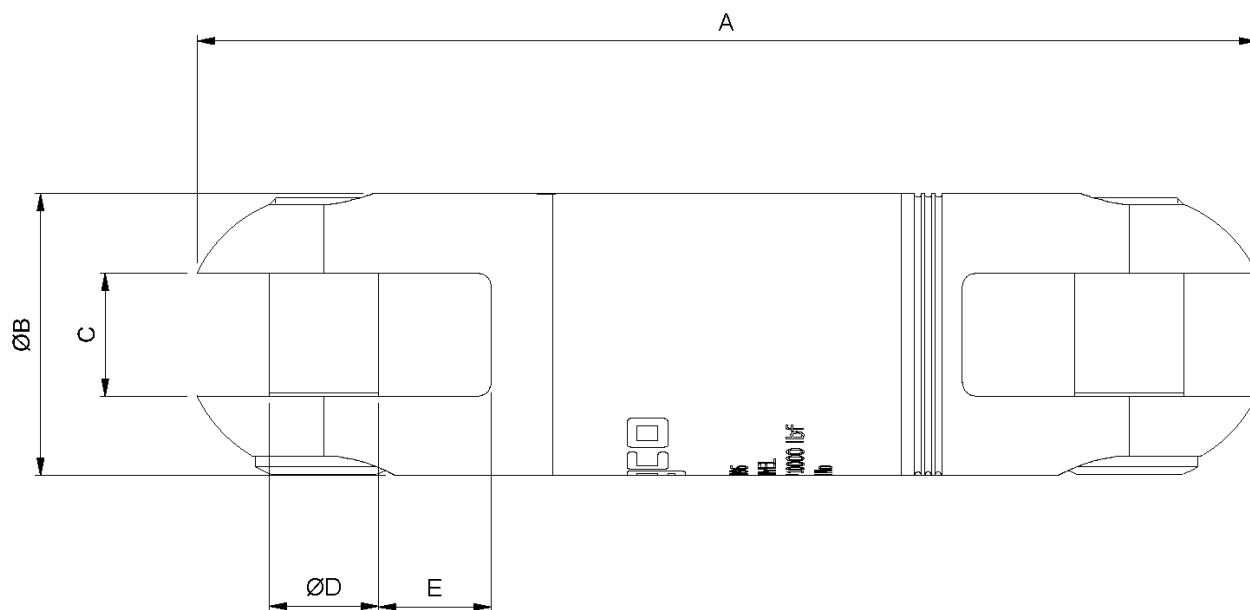

Slingco part no.	SWL Underground (lb)	SWL Underground (KN)	SWL Overhead (lb)	SWL Overhead (KN)	A (in)	A (mm)	B (in)	B (mm)	C (in)	C (mm)	D (in)	D (mm)	E (in)	E (mm)	Weight (lb)	Weight (kg)
ZSW6124	36,000	160	21,600	96	10.3	262	2.44	62	1	25.4	1.06	27	1.14	29	8.87	4.02
ZSW6125	50,000	222	30,000	133	12.4	315	2.76	70	1	25.4	1.06	27	1.14	29	13.26	6.02

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478