


I-GRIPS

WARNING

Cancer and Reproductive Harm: www.p65warnings.ca.gov

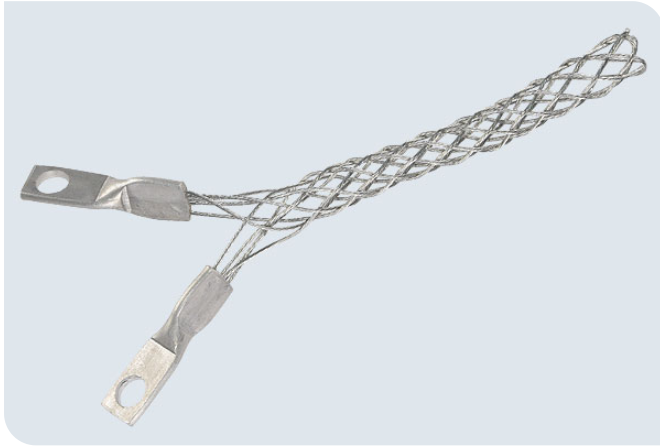

KEY FEATURES

- ✓ Two eye connectors on grip
- ✓ Galvanised wire with aluminium connectors
- ✓ Designed for use with cord clamps/plugs

Strain Relief mesh sock with crimped eye connectors for easy attachment to cord clamps. Eye connectors allow for attachment with screws for secure placement and hold. Made of galvanised wire these socks come in a variety of cable ranges. When installed relieves strain from bend angle and secures cord from pull out potential. Connectors made of aluminium.




GET IN TOUCH

 01706 855 558

 sales@slingco.com

I-GRIPS

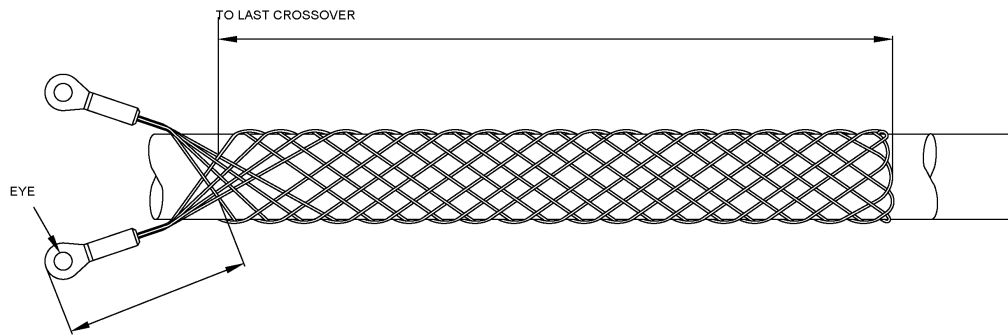

Slingco Part No.	Size Range (mm)	Size Range (in)	Mesh Length (mm)	Mesh Length (in)	Eye Opening (mm)	Eye Opening (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS8527	5.6 - 8.1	0.22 - 0.32	114.3	4.5	8.1	0.32	45.36	100
ZCS8513	7.62 - 11	0.30 - 0.43	114.3	4.5	8.1	0.32	81.64	180
ZCS8514	10 - 14	0.40 - 0.56	127	5	8.1	0.32	81.64	180
ZCS8515	13.2 - 19	0.52 - 0.73	157.5	6.5	8.1	0.32	204	450
ZCS8516	18 - 22	0.70 - 0.85	216	8.5	8.1	0.32	272	600
ZCS8517	21 - 25	0.82 - 1.00	216	8.5	8.1	0.32	272	600
ZCS8518	24 - 32	0.94 - 1.25	298.5	11.75	8.1	0.32	272	600
ZCS11560	44.45 - 50.8	1.75 - 2.0	298.5	11.75	6.3	0.25	272	600

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps

If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478